



INDOOR TECHNICAL LIGHTING

CATALOGUE
AUGUST 2025



CRAFTING BRILLIANCE IN EVERY BEAM



LITOMATIC

INDEX

06-08

About Litomatic

09

About Select Series

10

Our Presence

11-16

Antiglare Spotlight

17

Compact Antiglare Spotlight

18-20

Minimal Spotlight

21

Low Depth Spotlight

22

Minimal Spotlight

23

Antiglare Spotlight

24

Spotlight

25-27

Antiglare Spotlight

28-29

Spotlight

30-31

Pullout Spotlight

32-33

Minimal Spotlight

34-35

Pin Hole Spotlight

36

Polarized Wallwasher

37

Mirror Spotlight

38-39

Steam Proof Spotlight

INDEX

40-41	Antiglare Spotlight
42-45	Laserblade
46	Wall Grazer
47	Wall Uplighter
48	Antiglare Spotlight
49	Adjustable Spotlight
50	Zoomlight
51	Wallwasher Profile
52-55	Surface Spotlight
56-58	Tracklight
59	Mini Spotlight
60-67	20MM Magnetic Series
68-69	20MM Hanging
70	20MM Magnetic Accessories
71-74	10MM Magnetic Series
75	10MM Magnetic Accessories
76-77	Remote / Sensors / Gateway / Touch Panel
78	Our Clients



About Litomatic

Established in 1992 as Kardhar Electric Co., Litomatic has grown into a leading name in the lighting industry. With Raj Kothari joining in 2011 and supported by Ashish Kothari's expertise. Formally founded in 2016, Litomatic swiftly pioneered remote-controlled tunable and dimmable lighting in India, ensuring superior products through extensive testing in Udaipur. Litomatic also boasts a well-equipped in-house lab that supports its manufacturing processes, enhancing reliability and delivering complete lighting solutions without needing external consultants or service providers. Participation in key exhibitions from 2017 to 2019 bolstered its reputation, leading to a state-of-the-art manufacturing facility.

Guided by in-house R&D, Litomatic's advanced LED and COB technology ensures precision and efficiency. The brand's commitment to the 'Make in India' initiative and over 550+ dies and molds reflect its dedication to innovation and quality. With a network of over 300+ partners across 110+ cities, Litomatic continues to revolutionise spaces with exceptional lighting solutions. Litomatic stands as a beacon of excellence, poised to illuminate the future.

FEATURES



50,000
Hours

SD
CM

<3

HIGH
CRI

80/90/95



High
Lumens

5

Year
Warranty*



Flicker Free



Upto 3.5KV
Surge



440V
OVP

CERTIFIED

IS- 15885
(Part 2/Sec 13) : 2012



R - 84003603
www.bis.gov.in

IS- 10322
(Part 5/Sec 1) : 2012



R - 84004740
www.bis.gov.in

IS- 10322
(Part 5/Sec 2) : 2012



R - 84004669
www.bis.gov.in

IS- 10322
(Part 5/Sec 7) : 2017



R - 84004685
www.bis.gov.in



9001 : 2015



14001 : 2015



45001 : 2018





LITOMATIC R&D

Lighting Innovations - Product Development & Design

LITOMATIC's expertise shines in luminaire engineering, blending aesthetics and functionality for unrivalled brilliance. Our meticulous approach encompasses the precise selection of light sources, materials with optimal heat sink capacity, and cutting-edge technologies. With a keen focus on achieving the highest standard of lighting emission, each functional prototype serves as a catalyst for refining elements and orchestrating a seamless creative progression. Experience the alchemy of innovation as we illuminate the path to luminaire excellence.

Factory Innovations - Crafting Excellence

At Litomatic, we are dedicated to delivering products that embody contemporary design through exceptional craftsmanship. Our cautious material selection, accurate finishing, and continuous research and development ensure durable and reliable products that elevate the global market. Each creation harmoniously fuses structure, light, and architecture, challenging artistic boundaries.

Machining Center - Precision Meets Artistry

Our cutting-edge machining centers enable us to achieve uncompromising quality, from grinding to precise processing. These high-precision machines play an indispensable role in crafting our finest products.

Exquisite Workmanship - Quality and Beauty

Litomatic lamps are renowned for their superior quality and meticulous manufacturing. From mold manufacturing to die casting, we passionately uphold the highest standards of craftsmanship.

Seamless Assembly - Precision and Safety

Our skilled staff follows strict procedures on electrical and mechanical assembly lines, guaranteeing compliance with regulations. We prioritize electrical safety checks, ensuring the utmost reliability of our luminaires.

Packing and Delivery - Global Excellence

Every Litomatic product undergoes painstaking preparation and packaging, ready to be shipped worldwide. As a trusted brand, Litomatic delivers excellence to customers across numerous countries and regions.





CRI Technology for Color Accuracy

Color accuracy is crucial in lighting, and the Color Rendering Index (CRI) helps assess how faithfully a light source reveals colors compared to natural light. LED lighting, with its different color temperatures and light variations, directly affects color accuracy. Opting for higher CRI-rated LEDs ensures more accurate color representation. Experience vibrant and true-to-life colors with Litomatic's advanced CRI technology.

Glare-Free LED Lighting

At Litomatic, we prioritize the ultimate lighting experience with our precision-engineered anti-glare technology. Through meticulous control and innovative design, we ensure secondary optical refraction curves and superior electroplate treatment, resulting in flicker-free, high-performance lighting even in low-light conditions. With a generous beam angle of up to 40°, our luminaires create a serene and comfortable lighting atmosphere, allowing you to enjoy the illumination without any distracting glare.

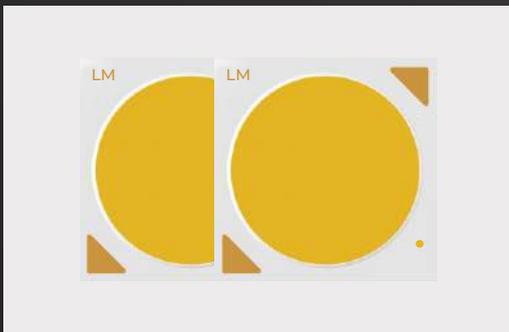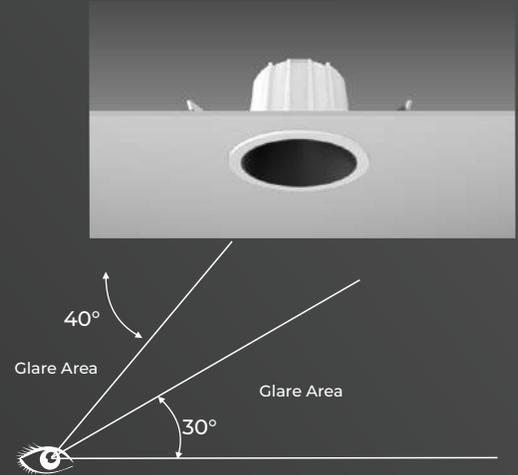

LED Chips Illuminating Innovation

LED chips, the heart of modern lighting, revolutionize illumination with advanced technology. These compact semiconductor devices drive efficiency, superior color rendering, and remarkable longevity. Powering smart light bulbs and energy-saving solutions, LED chips redefine lighting experiences. Illuminate your space with efficiency and brilliance using Litomatic's high-quality LED chips.

Brilliant COB Lighting

Experience flawless lighting with Litomatic's cutting-edge Chip-On-Board (COB) technology. Our COB fixtures deliver even natural light without double images, creating a clean and dimensionally rich lighting experience. Say goodbye to blurry edges and embrace Litomatic's superior COB lighting for captivating illumination.



ABOUT **Select** SERIES



Select
SERIES

5 Year
Warranty*


Introducing the Select Lighting Series by Litomatic—a pinnacle of premium illumination, designed to enhance luxurious residential settings with unparalleled elegance. This exclusive range offers exceptional anti-glare performance, blending seamlessly into sophisticated interiors and providing a soothing visual experience. Equipped with top-tier drivers, each fixture delivers superior energy efficiency, flicker-free illumination, and extended longevity. These products also feature advanced optics for outstanding performance, making them a preferred choice for discerning architects, interior designers and lighting consultants. The Select Series strikes a perfect balance of aesthetics and performance, elevating the ambience of any high-end living space with lasting brilliance.



1st
PIONEER
with this CONCEPT
SINCE **2016**



RF 2.4G + BLE

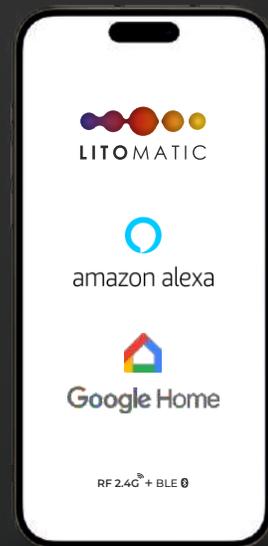




OUR PRESENCE

110+ Cities 300+ Dealers Across India

Agra, Ahmedabad, Ajmer, Akola, Ambikapur, Amravati, Amritsar, Anand, Aurangabad, Balgaum, Banswara, Bareilly, Barmer, Barnala, Begur, Begusarai, Bengaluru, Bharuch, Bhatinda, Bhavnagar, Bhilai, Bhilwara, Bhopal, Bhubaneswar, Bikaner, Bilaspur, Chandigarh, Chennai, Cochin, Coimbatore, Dehradun, Dhule, Durg, Ernakulam, Faridabad, Fatehabad, Firozabad, Gandhidham, Ghaziabad, Goa, Gorakhpur, Gurgaon, Guwahati, Hanumangarh, Hazaribagh, Hisar, Hubballi, Hyderabad, Indore, Jabalpur, Jaipur, Jalgaon, Jamnagar, Jind, Jodhpur, Jalandhar, Kannur, Karnal, Khanna, Kishangarh, Kolhapur, Kolkata, Kota, Kozhikode, Kutch, Lucknow, Ludhiana, Madurai, Malur, Manguluru, Mathura, Meerut, Moga, Morbi, Mumbai, Mysore, Nabha, Nagpur, Nanded, Nashik, Navi Mumbai, New Delhi, Noida, Panipat, Patiala, Patna, Prayagraj, Pune, Raipur, Rajkot, Rajsamand, Ranchi, Ratlam, Salem, Satara, Secunderabad, Sikar, Siliguri, Siwan, Solapur, Surat, Talegaon, Thane, Thrissur, Tiruppur, Trichy, Trivandrum, Udaipur, Vadodara, Visakhapatnam.

PHANTOM

ANTIGLARE SPOTLIGHT

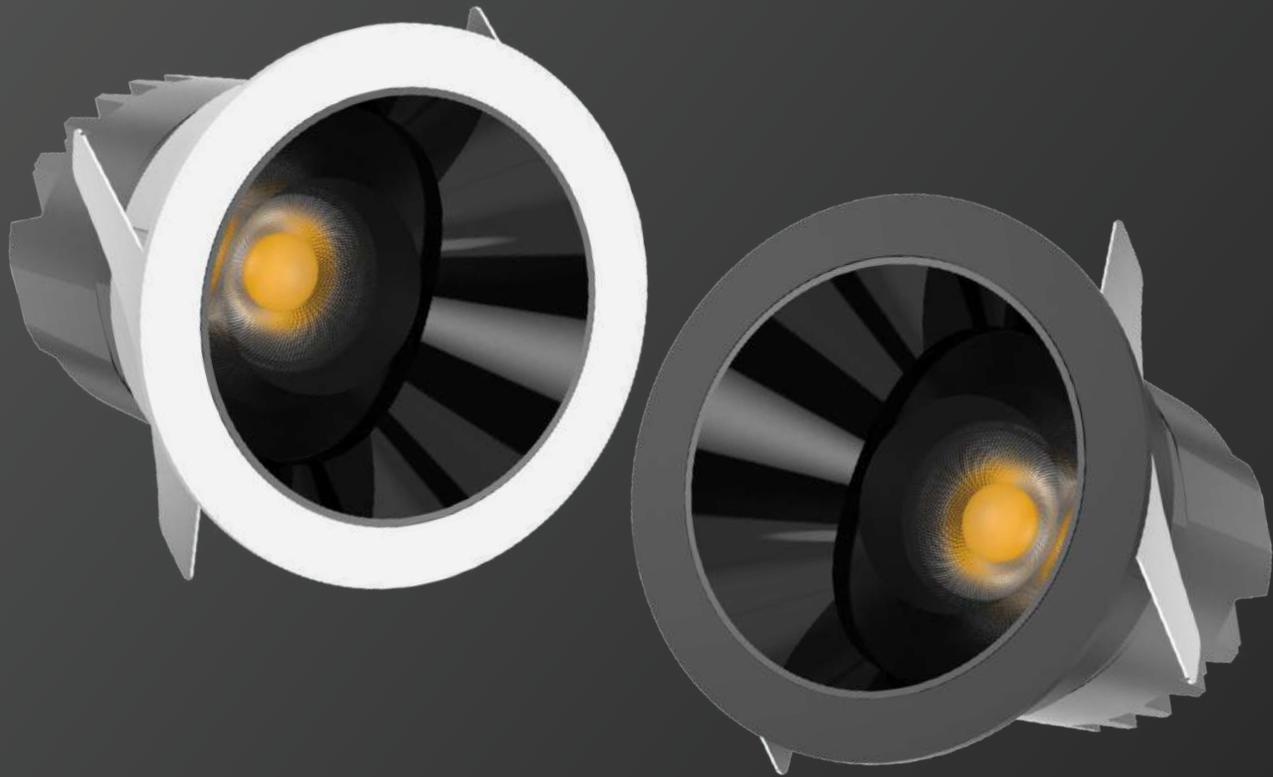


Dimming & Tuning Technology



RF 2.4G + BLE TRIAC/PHASE CUT Zigbee


BK WH Body Color Available

Watt	:	7-9w	12-15w	20-25w
Dimension	:	62X83mm	82X96mm	105X115mm
Cut Out	:	55mm	75mm	90mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)		
		Note : 2700/3500/5000k (available on request)		
Beam Angle	:	15/24/36/60°		
CR (Ra)	:	80 (90/95 available on request)		
Material	:	Die Cast Aluminium ADC-12		
LED Brand	:	Litomatic/Bridgelux		

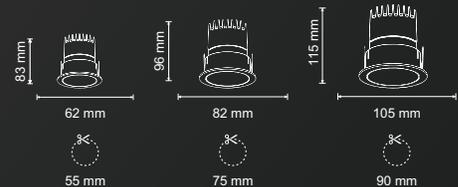

PHANTOM

DOUBLE ANTIGLARE SPOTLIGHT

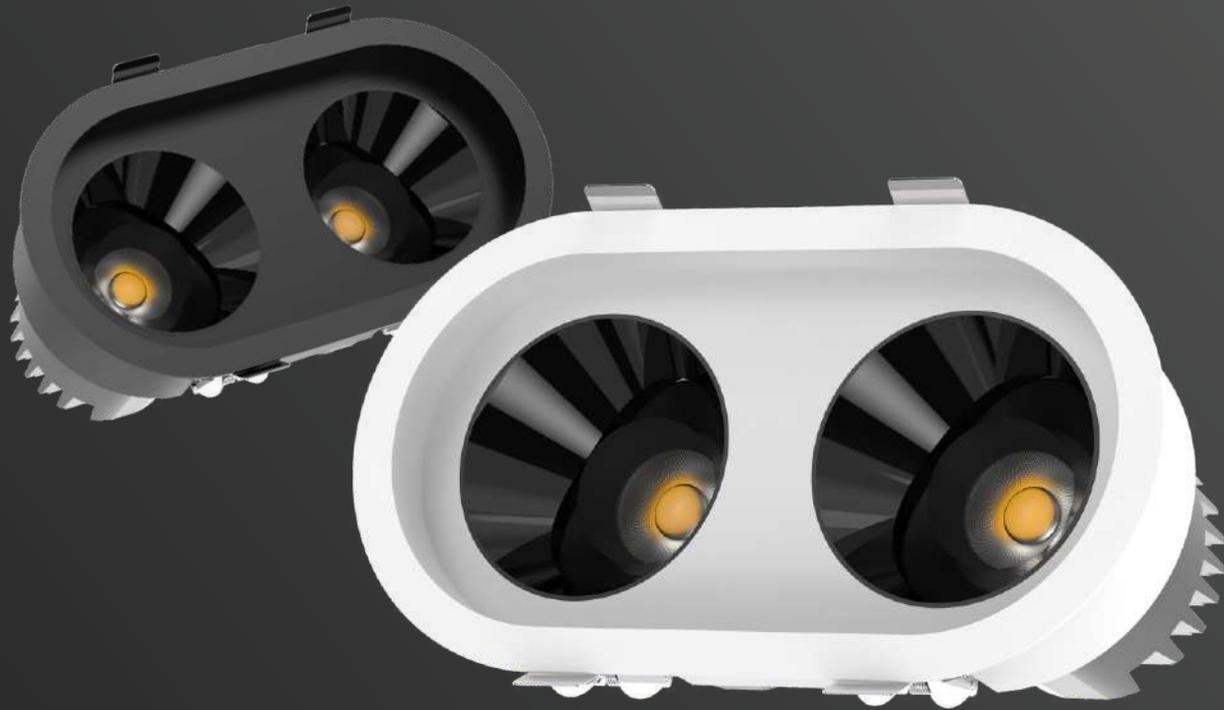

Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT

Zigbee

BK


WH

Body Color Available

Watt	:	2X7-9w	2X12-15w	2X20-25w
Dimension	:	140X80X87mm	195X105X107mm	250X125X126mm
Cut Out	:	125X65mm	178X88mm	235X110mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)		

Note : 2700/3500/5000k (available on request)

Beam Angle	:	15/24/36/60°
CRI (Ra)	:	80 (90/95 available on request)
Material	:	Die Cast Aluminium ADC-12
LED Brand	:	Litomatic/Bridgelux

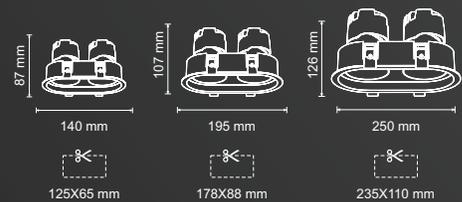

50,000 Hours



High Lumens



Flicker Free



Upto 3.5KV Surge



440V OVP



5 Year Warranty*




Anti Glare



IP44
IP Rating On Request

PHANTOM

ANTIGLARE SPOTLIGHT

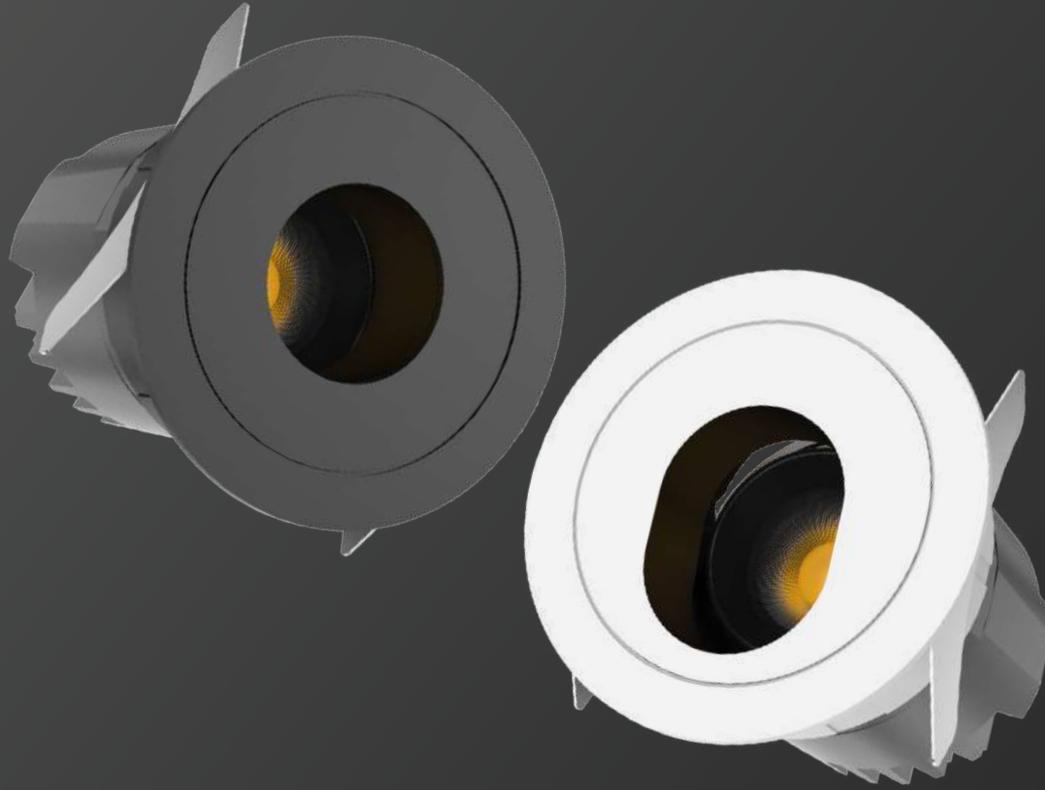

Dimming & Tuning Technology




RF 2.4G + BLE

TRIAC/PHASE CUT Zigbee


BK WH Body Color Available

Watt	:	12-15w (Pin Hole & Wallwasher)
Dimension	:	85X95mm
Cut Out	:	75mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)
		Note : 2700/3500/5000k (available on request)
Beam Angle	:	15/24/36/60°
CRI (Ra)	:	80 (90/95 available on request)
Material	:	Die Cast Aluminium ADC-12
LED Brand	:	Litomatic/Bridgelux



PHANTOM

TRIMLESS ANTIGLARE SPOTLIGHT

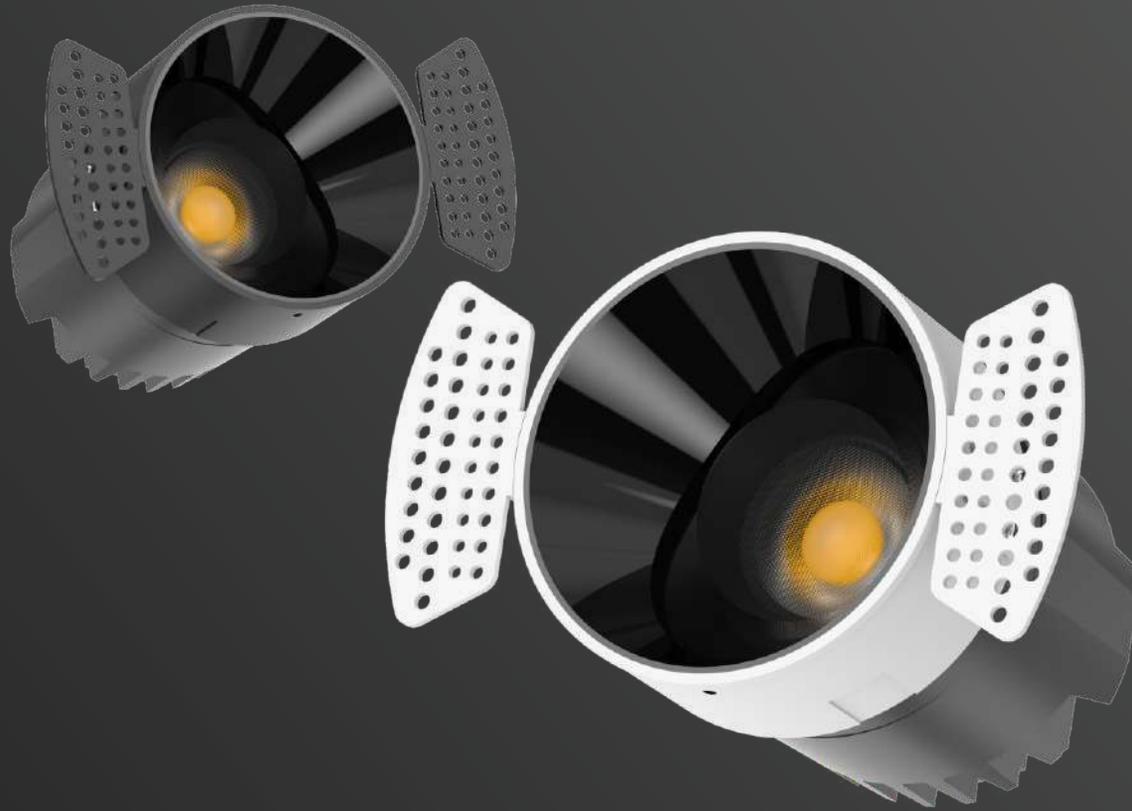

Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT

Zigbee

BK

WH

Body Color Available

Watt	:	7-9w	12-15w	20-25w
Dimension	:	55X83mm	75X95mm	90X115mm
Cut Out	:	55mm	75mm	90mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)		

Note : 2700/3500/5000k (available on request)

Beam Angle	:	15/24/36/60°
CRI (Ra)	:	80 (90/95 available on request)
Material	:	Die Cast Aluminium ADC-12
LED Brand	:	Litomatic/Bridgelux



50,000 Hours



High Lumens



Flicker Free



Upto 3.5KV Surge



440V OVP



5 Year Warranty*






Anti Glare



IP44 Rating On Request

PHANTOM

ANTI GLARE SPOTLIGHT

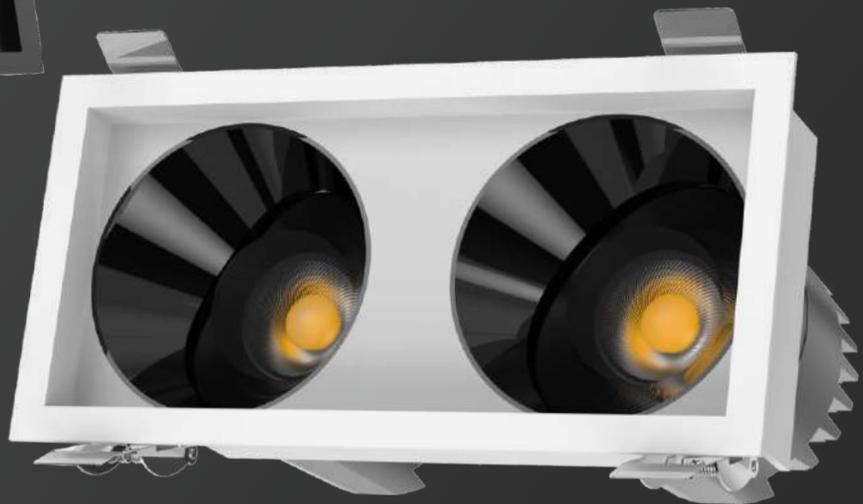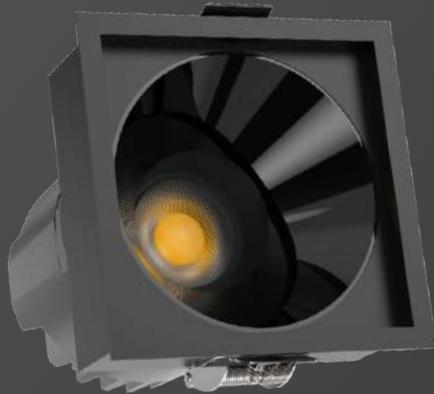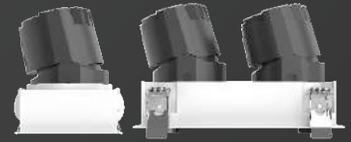

Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT


Zigbee

BK


WH

Body Color Available

Watt	:	12-15w	2X12/2X15w
Dimension	:	85X85X105mm	180X90X115mm
Cut Out	:	75X75mm	165X75mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	15/24/36/60°	
CRI (Ra)	:	80 (90/95 available on request)	
Material	:	Die Cast Aluminium ADC-12	
LED Brand	:	Litomatic/Bridgelux	



ANTI GLARE SPOTLIGHT

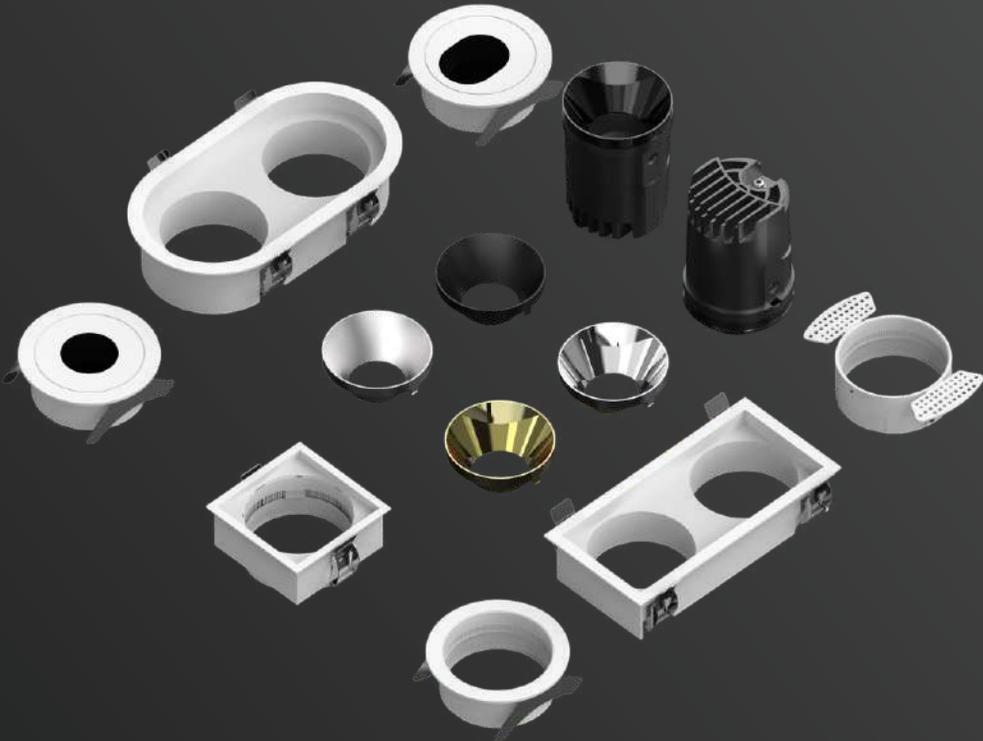

50,000 Hours



High Lumens



Flicker Free



Upto 3.5KV Surge



440V OVP

5 Year Warranty*



Anti Glare



IP Rating On Request

PUNCH

COMPACT ANTIGLARE SPOTLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT


Zigbee

BK

WH

Body Color Available

Watt	:	9-12w
Dimension	:	55X80mm
Cut Out	:	50mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable) Note : 2700/3500/5000k (available on request)
Beam Angle	:	15/24/36/60°
CRI (Ra)	:	80 (90/95 available on request)
Material	:	Die Cast Aluminium ADC-12
LED Brand	:	Litomatic/Bridgelux



50,000
Hours



High
Lumens



Flicker Free



Upto 3.5KV
Surge



440V
OVP




5
Year
Warranty*



Anti Glare



MINIMAL SPOTLIGHT

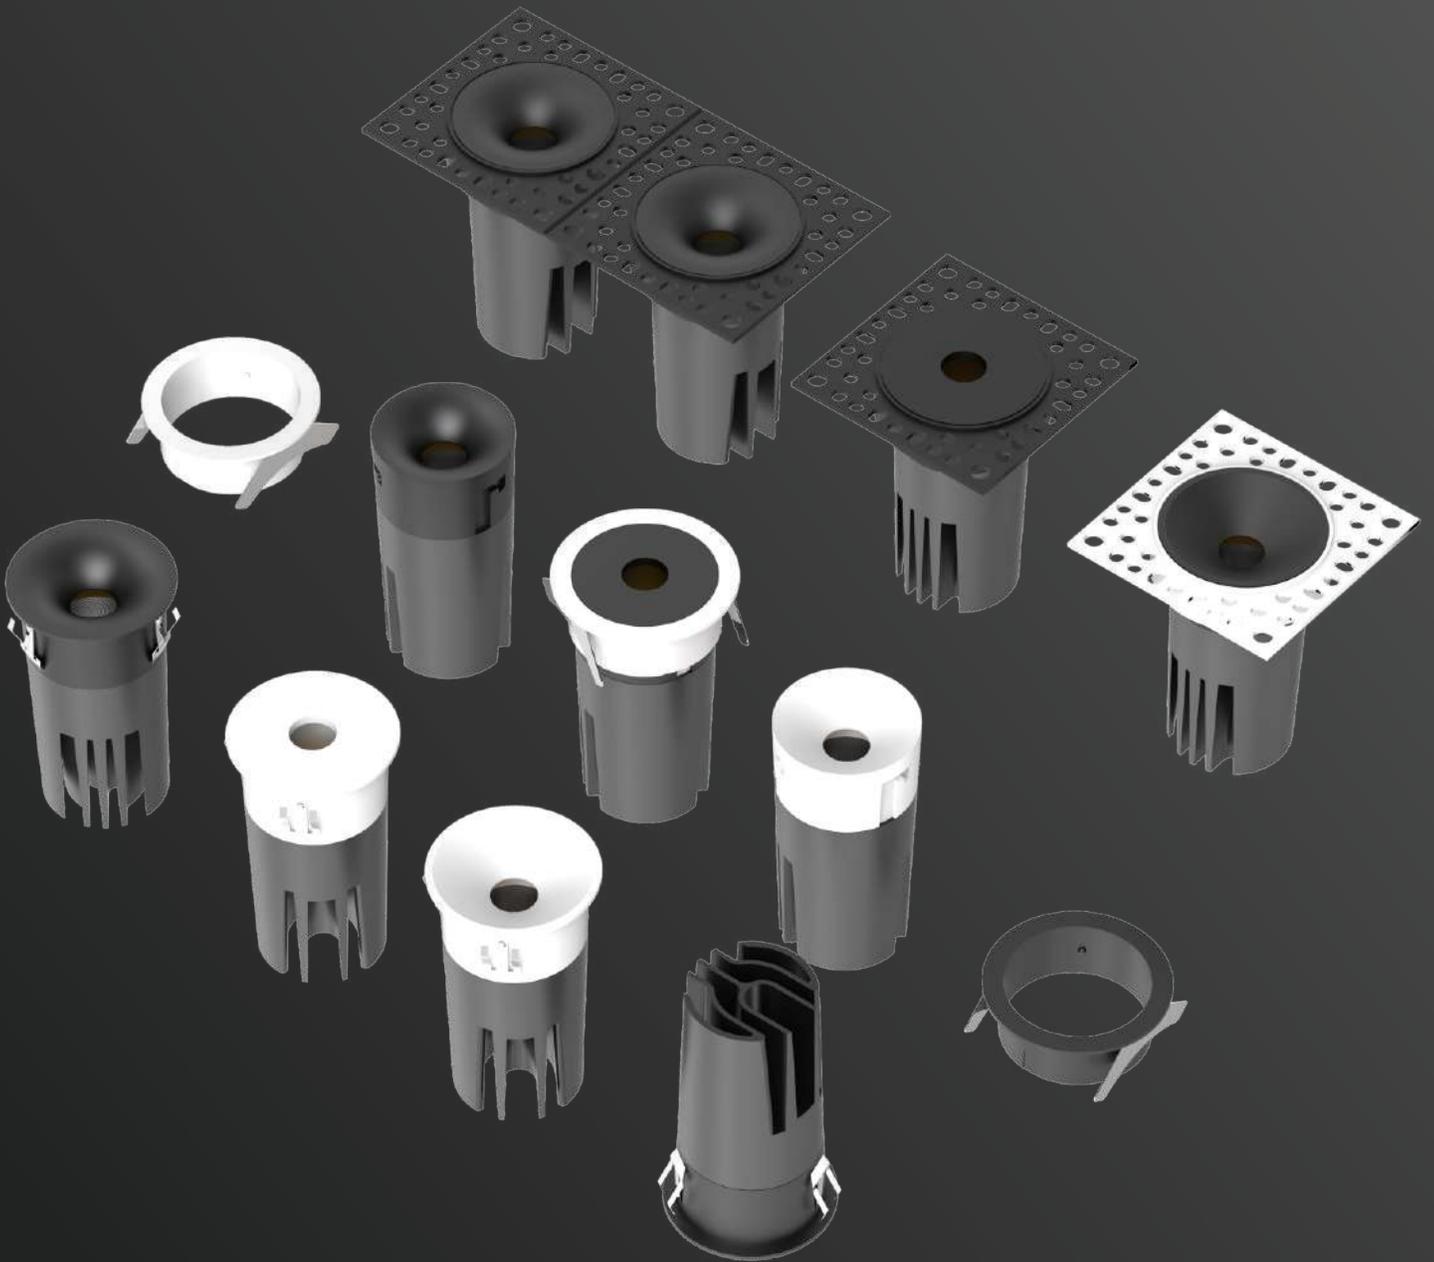

BLAZE CONE STAR

MINIMAL SPOTLIGHT

Watt	:	9-12w
Dimension	:	52X90mm
Cut Out	:	45mm
Beam Angle	:	24/36/50°
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)
		Note : 2700/3500/5000k (available on request)
CRI (Ra)	:	80 (90/95 available on request)
Material	:	Die Cast Aluminium ADC-12
LED Brand	:	Litomatic/Bridgelux

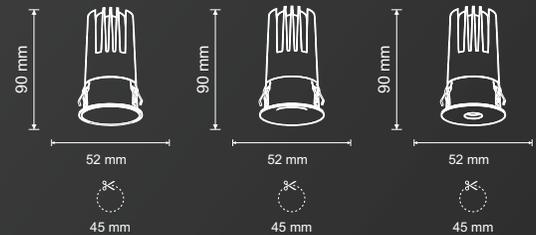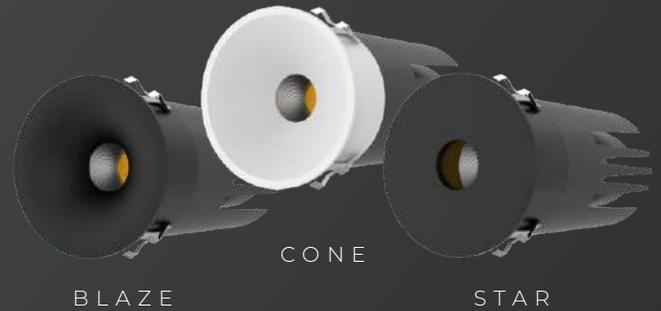


NEW
ARRIVAL

BLAZE CONE STAR

DETACHABLE SPOTLIGHT

Watt	:	9-12w
Dimension	:	58X95mm
Cut Out	:	48mm
Beam Angle	:	24/36/50°
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)
		Note : 2700/3500/5000k (available on request)
CRI (Ra)	:	80 (90/95 available on request)
Material	:	Die Cast Aluminium ADC-12
LED Brand	:	Litomatic/Bridgelux

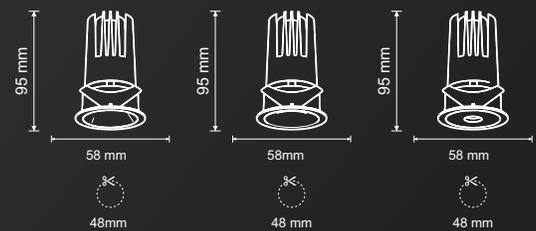

Dimming & Tuning Technology





BK WH Body Color Available



BLAZE CONE STAR

TRIMLESS DETACHABLE SPOTLIGHT

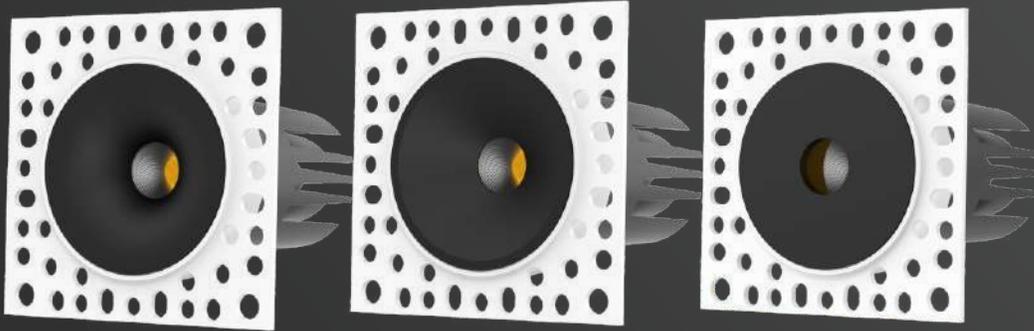

BLAZE

CONE

STAR

Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT

Zigbee


BK

WH

Body Color Available

NEW
ARRIVAL

Watt	:	9-12W
Dimension	:	65x65X90mm
Cut Out	:	45X45mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)
		Note : 2700/3500/5000k (available on request)
Beam Angle	:	24/36/50°
CRI (Ra)	:	80 (90/95 available on request)
Material	:	Die Cast Aluminium ADC-12
LED Brand	:	Litomatic/Bridgelux

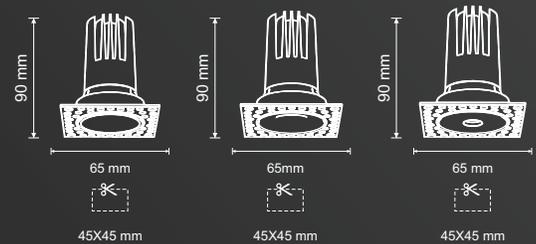

50,000
Hours



High
Lumens



Flicker Free



Upto 3.5KV
Surge



440V
OVP



5
Year
Warranty*



Anti Glare

FORD

LOW DEPTH SPOTLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT


Zigbee

BK

WH

Body Color Available

Watt	:	12-15w	20-25w
Dimension	:	95X45mm	105X45mm
Cut Out	:	90mm	98mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	24/36/60°	24/36/60°
CRI (Ra)	:	80 (90/95 available on request)	
Material	:	Die Cast Aluminium ADC-12	
LED Brand	:	Litomatic/Bridgelux	



ARROW

MINIMAL SPOTLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT


Zigbee

BK

WH

Body Color Available

Watt	:	7w	12w
Dimension	:	40X85mm	55X100mm
Cut Out	:	35mm	48mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	24/36/55°	15/24/36/60°
CRI (Ra)	:	80 (90/95 available on request)	
Material	:	Die Cast Aluminium ADC-12	
LED Brand	:	Litomatic/Bridgelux	



50,000
Hours



High
Lumens



Flicker Free



Upto 3.5KV
Surge



440V
OVP



5
Year
Warranty*



Anti Glare

INTENSE

ANTIGLARE SPOTLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT

Zigbee

BK

WH


Body Color Available

Watt	:	7-9w	12-15w	20-25w
Dimension	:	72X48mm	85X58mm	100X73mm
Cut Out	:	62mm	75mm	85mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)		
		Note : 2700/3500/5000k (available on request)		
Beam Angle	:	24/36/55°		
CRI (Ra)	:	80 (90/95 available on request)		
Material	:	Die Cast Aluminium ADC-12		
LED Brand	:	Litomatic/Bridgelux		



HAWK

SPOTLIGHT

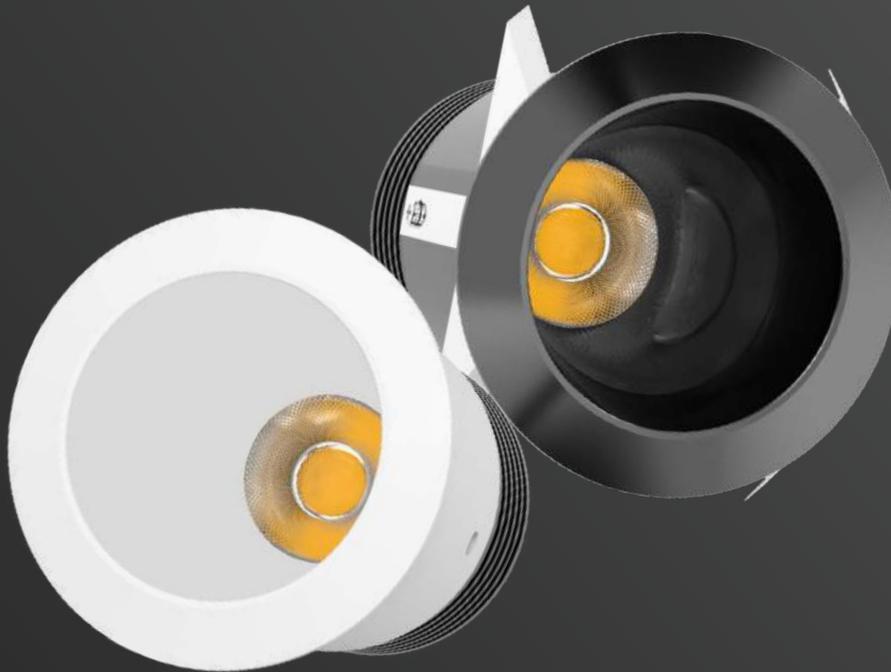

Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT

Zigbee

BK

WH


Body Color Available

NEW
ARRIVAL

Watt	:	7w	12w	18w
Dimension	:	45X75mm	60X90mm	80X117mm
Cut Out	:	35mm	50mm	70mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)		

Note : 2700/3500/5000k (available on request)

Beam Angle	:	36°
CRI (Ra)	:	80 (90/95 available on request)
Material	:	Aluminium
LED Brand	:	Litomatic/Bridgelux

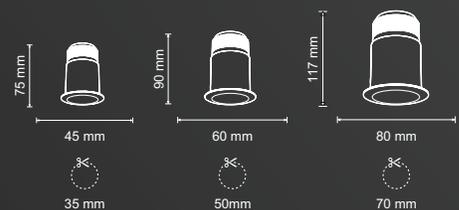

50,000
Hours



High
Lumens



Flicker Free



Upto 3.5KV
Surge



440V
OVP



5
Year
Warranty*



Anti Glare



ANTIGLARE SPOTLIGHT



50,000
Hours



High
Lumens



Flicker Free



Upto 3.5KV
Surge



440V
OVP

5

Year
Warranty*




Anti Glare

EVOKE

ANTIGLARE SPOTLIGHT



Watt	:	12w	20w
Dimension	:	62X75mm	83X85mm
Cut Out	:	55mm	75mm
Beam Angle	:	15/24/36/50°	15/24/36/50°

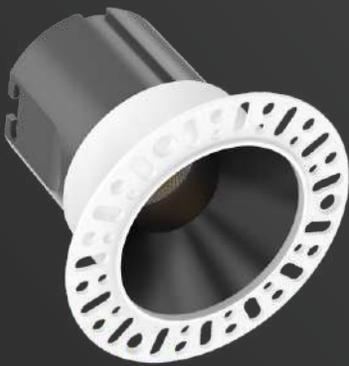

EVOKE

TRIMLESS DETACHABLE SPOTLIGHT

Watt	:	12w	20w
Dimension	:	80X75mm	112X85mm
Cut Out	:	55mm	75mm
Beam Angle	:	15/24/36/50°	15/24/36/50°

NEW
ARRIVAL

EVOKE

DETACHABLE SPOTLIGHT

Watt	:	12w	20w
Dimension	:	62X75mm	82X85mm
Cut Out	:	55mm	75mm
Beam Angle	:	15/24/36/50°	15/24/36/50°
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)	
		Note : 2700/3500/5000k (available on request)	
CRI (Ra)	:	80 (90/95 available on request)	
Material	:	Die Cast Aluminium ADC-12	
LED Brand	:	Litomatic/Bridgelux	



Dimming & Tuning Technology



RF 2.4G + BLE TRIAC/PHASE CUT Zigbee

BK WH Body Color Available



50,000
Hours



High
Lumens



Flicker Free



Upto 3.5KV
Surge



440V
OVP



5
Year
Warranty*



Anti Glare

BRAVO

ANTIGLARE SPOTLIGHT



Watt	:	12w	20w
Dimension	:	62X75mm	83X85mm
Cut Out	:	55mm	75mm
Beam Angle	:	15/24/36/50°	15/24/36/50°



BRAVO

TRIMLESS DETACHABLE SPOTLIGHT

Watt	:	12w	20w
Dimension	:	80X75mm	112X85mm
Cut Out	:	55mm	75mm
Beam Angle	:	15/24/36/50°	15/24/36/50°

NEW
ARRIVAL

BRAVO

DETACHABLE SPOTLIGHT

Watt	:	12w	20w
Dimension	:	62X75mm	82X85mm
Cut Out	:	55mm	75mm
Beam Angle	:	15/24/36/50°	15/24/36/50°
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable) Note : 2700/3500/5000k (available on request)	
CRI (Ra)	:	80 (90/95 available on request)	
Material	:	Die Cast Aluminium ADC-12	
LED Brand	:	Litomatic/Bridgelux	



Dimming & Tuning Technology



RF 2.4G + BLE


TRIAC/PHASE CUT Zigbee

BK WH Body Color Available



OSCAR

SPOTLIGHT

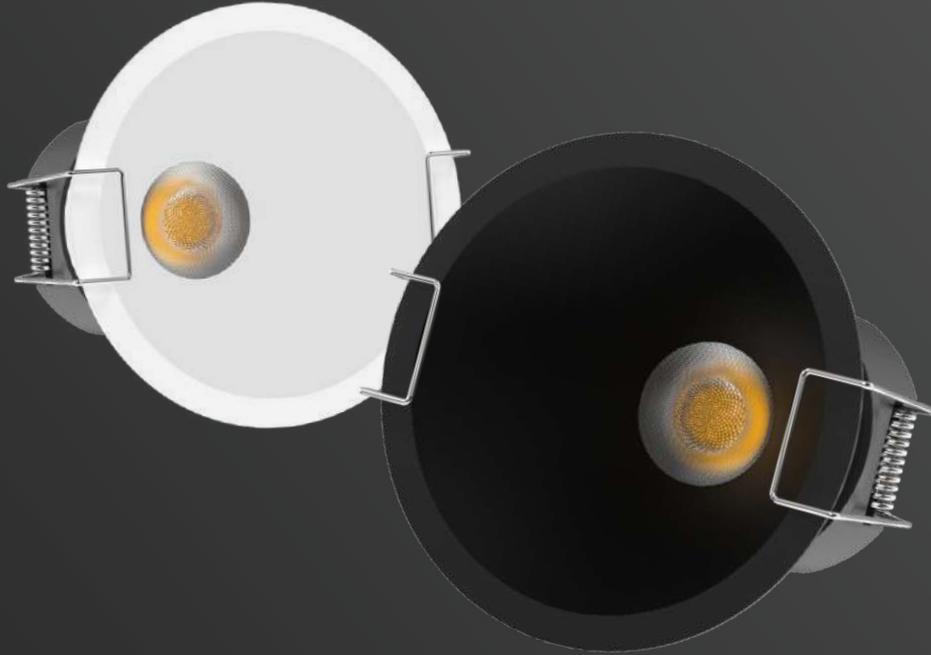

Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT

Zigbee

BK

WH

Body Color Available

Watt	:	7-9w	12-15w	20-25w
Dimension	:	75X72mm	85X82mm	105X98mm
Cut Out	:	65mm	75mm	95mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)		
		Note : 2700/3500/5000k (available on request)		
Beam Angle	:	24/36/50°		
CRI (Ra)	:	80 (90/95 available on request)		
Material	:	Die Cast Aluminium ADC-12		
LED Brand	:	Litomatic/Bridgelux		



50,000 Hours



High Lumens



Flicker Free



Upto 3.5KV Surge



440V OVP




5 Year Warranty*



Anti Glare

ROAST

SPOTLIGHT

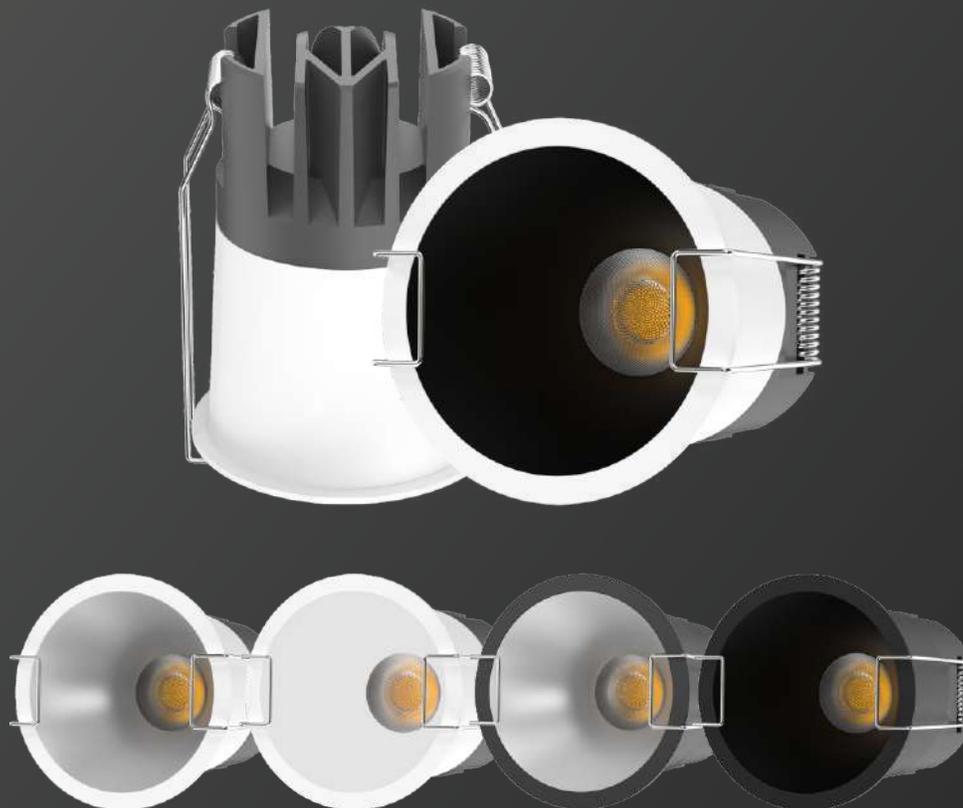

Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT

Zigbee

BK

WH

Body Color Available

Watt	:	7-9w	12-15w	20-25w
Dimension	:	60X78mm	70X80mm	85X80mm
Cut Out	:	55mm	65mm	75mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)		

Note : 2700/3500/5000k (available on request)

Beam Angle	:	24/36/50°
CRI (Ra)	:	80 (90/95 available on request)
Material	:	Die Cast Aluminium ADC-12
LED Brand	:	Litomatic/Bridgelux



SAPPHIRE

PULLOUT SPOTLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT


Zigbee

BK

WH

Body Color Available

Watt	:	7w	12w
Dimension	:	62X85mm	85X105mm
Cut Out	:	55mm	75mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	15/24/36/60°	
CRI (Ra)	:	80 (90/95 available on request)	
Material	:	Die Cast Aluminium ADC-12	
LED Brand	:	Litomatic/Bridgelux	



50,000
Hours



High
Lumens



Flicker Free



Upto 3.5KV
Surge



440V
OVP



5
Year
Warranty*




Anti Glare

SAPPHIRE

TRIMLESS PULLOUT SPOTLIGHT



Watt	:	7w	12w
Dimension	:	55X86mm	75X105mm
Cut Out	:	55mm	75mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	15/24/36/60°	
CRI (Ra)	:	80 (90/95 available on request)	
Material	:	Die Cast Aluminium ADC-12	
LED Brand	:	Litomatic/Bridgelux	



SAPPHIRE

DOUBLE PULLOUT SPOTLIGHT

Watt	:	2X7w	2X12w
Dimension	:	140X78X90mm	195X105X115mm
Cut Out	:	125X65mm	180X90mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	15/24/36/60°	
CRI (Ra)	:	80 (90/95 available on request)	
Material	:	Die Cast Aluminium ADC-12	
LED Brand	:	Litomatic/Bridgelux	

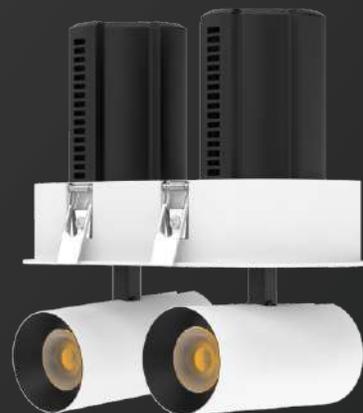

Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT Zigbee

BK WH Body Color Available





MINIMAL SPOTLIGHT



SPARO

MINIMAL SPOTLIGHT

Watt	:	9-12w	9-12w
Dimension	:	52X65mm	70X65mm
Cut Out	:	42mm	42mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	24/36°	
CRI (Ra)	:	80 (90/95 available on request)	
Material	:	Die Cast Aluminium ADC-12	
LED Brand	:	Litomatic/Bridgelux	

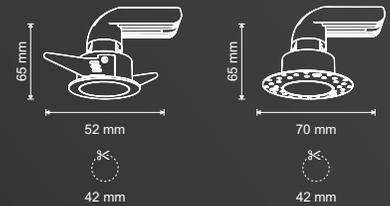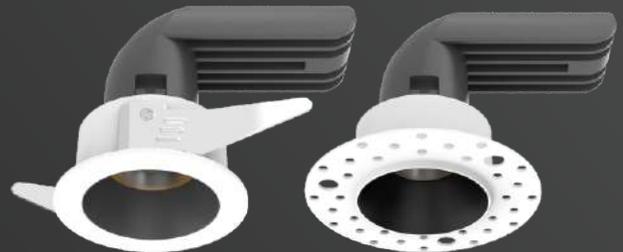

Dimming & Tuning Technology

 RF 2.4G + BLE  TRIAC/PHASE CUT Zigbee



BK **WH** Body Color Available



SPARO

MINIMAL SPOTLIGHT



Watt	:	9-12w	9-12w
Dimension	:	52X65mm	70X65mm
Cut Out	:	42mm	42mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	24/36°	
CRI (Ra)	:	80 (90/95 available on request)	
Material	:	Die Cast Aluminium ADC-12	
LED Brand	:	Litomatic/Bridgelux	

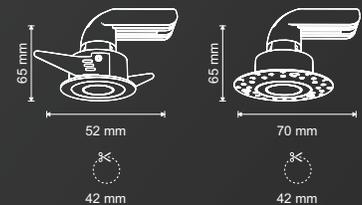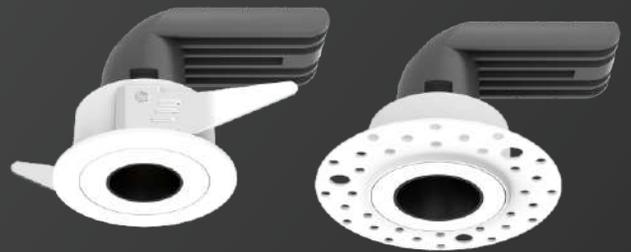

SPARO

MINIMAL SPOTLIGHT

Watt	:	9-12w	9-12w
Dimension	:	52X99mm	52X108mm
Cut Out	:	42mm	42mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	24/36°	
CRI (Ra)	:	80 (90/95 available on request)	
Material	:	Die Cast Aluminium ADC-12	
LED Brand	:	Litomatic/Bridgelux	

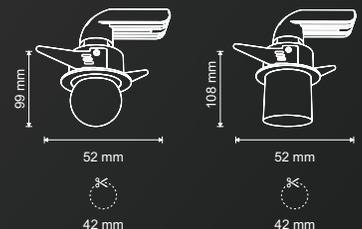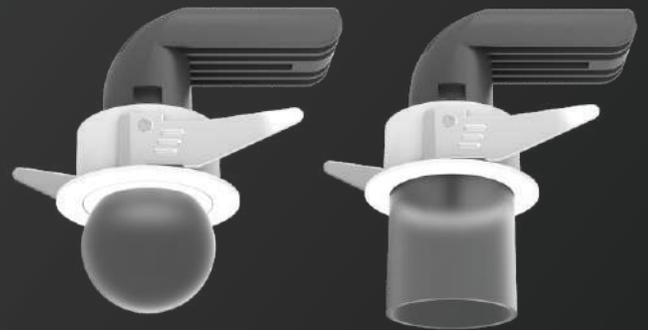

Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT Zigbee


BK WH Body Color Available



BEAM

PIN HOLE SPOTLIGHT



Watt	:	7w
Dimension	:	70X55mm
Cut Out	:	55mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable) Note : 2700/3500/5000k (available on request)
Beam Angle	:	24°
CRI (Ra)	:	80 (90/95 available on request)
Material	:	Die Cast Aluminium ADC-12
LED Brand	:	Litomatic/Bridgelux



BEAM

PIN HOLE TRIMLESS SPOTLIGHT

Watt	:	7w
Dimension	:	45X55mm
Cut Out	:	65mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable) Note : 2700/3500/5000k (available on request)
Beam Angle	:	24°
CRI (Ra)	:	80 (90/95 available on request)
Material	:	Die Cast Aluminium ADC-12
LED Brand	:	Litomatic/Bridgelux

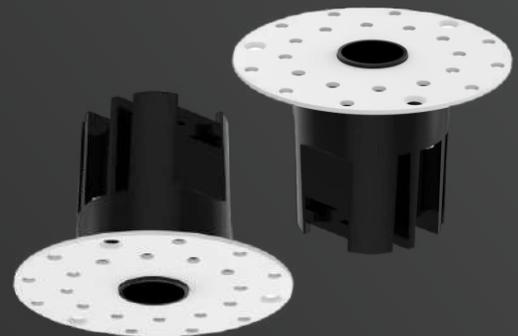

Dimming & Tuning Technology



RF 2.4G + BLE TRIAC/PHASE CUT Zigbee

BK WH Body Color Available



50,000
Hours



High
Lumens



Flicker Free



Upto 3.5KV
Surge



440V
OVP



5
Year
Warranty*



Anti Glare

NOZZLE

PIN HOLE SPOTLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT

Zigbee


BK

WH

Body Color Available


NEW
ARRIVAL

Watt	:	7-10w
Dimension	:	60X65mm
Cut Out	:	55mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)
		Note : 2700/3500/5000k (available on request)
Beam Angle	:	15°
CRI (Ra)	:	80 (90/95 available on request)
Material	:	Die Cast Aluminium ADC-12
LED Brand	:	Litomatic/Bridgelux



METEOR

POLARIZED WALLWASHER

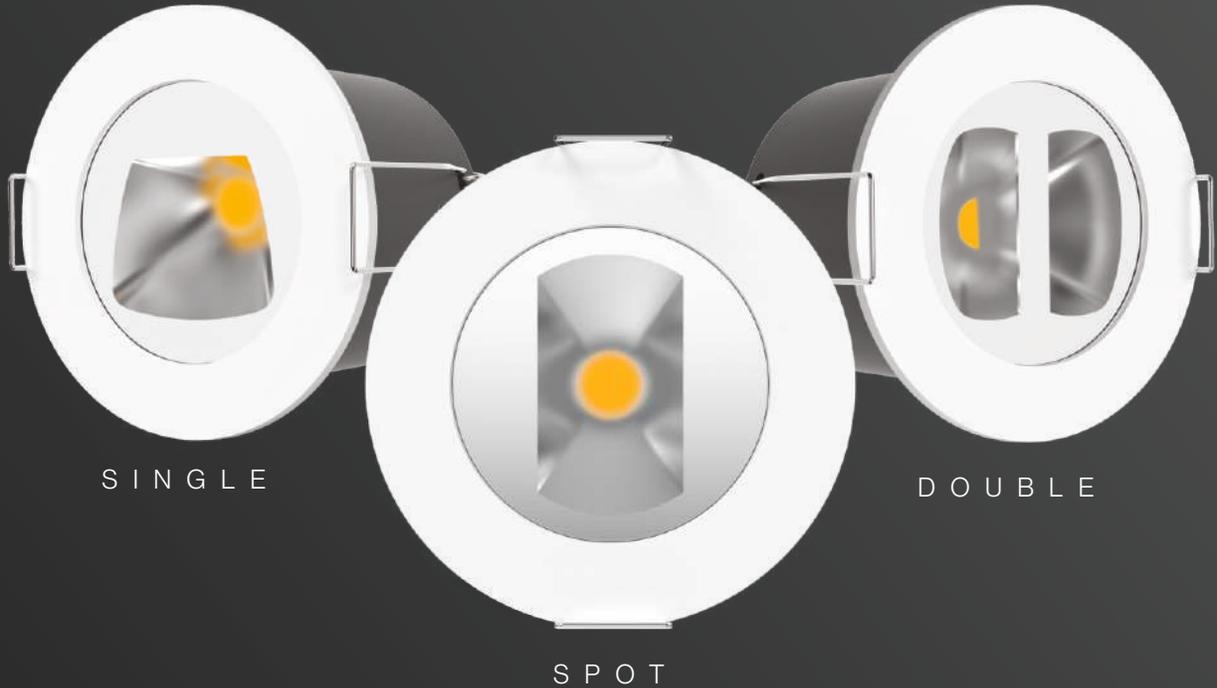

Dimming & Tuning Technology



RF 2.4G + BLE + TRIAC/PHASE CUT Zigbee

BK WH Body Color Available

Watt	:	12w
Dimension	:	80X60mm
Cut Out	:	70mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)
		Note : 2700/3500/5000k (available on request)
Beam Angle	:	55°
CRI (Ra)	:	80 (90/95 available on request)
Material	:	Die Cast Aluminium ADC-12
LED Brand	:	Litomatic/Bridgelux



50,000 Hours



High Lumens



Flicker Free



Upto 3.5KV Surge



440V OVP




5 Year Warranty*



Anti Glare

ASTOR

MIRROR SPOTLIGHT

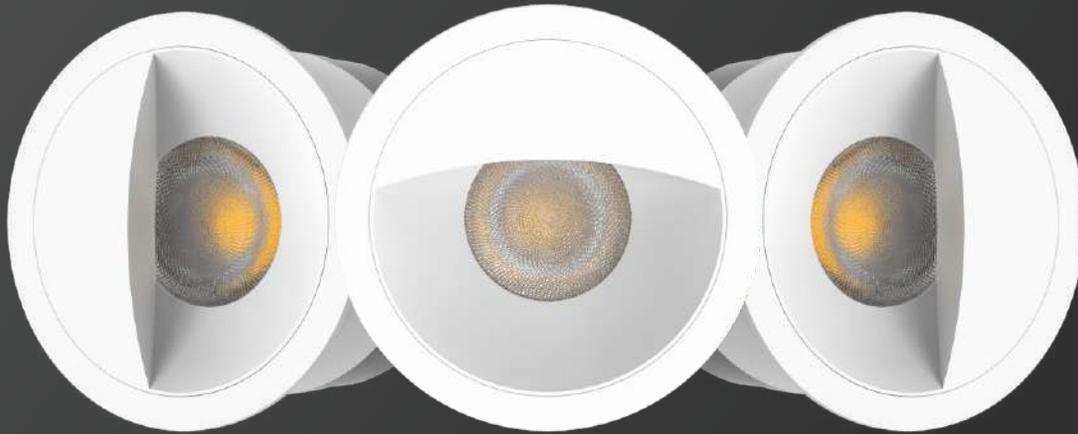

Dimming & Tuning Technology



RF 2.4G + BLE


TRIAC/PHASE CUT

Zigbee

WH Body Color Available

NEW
ARRIVAL

Watt	:	12w
Dimension	:	85X58mm
Cut Out	:	75mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)
		Note : 2700/3500/5000k (available on request)
Beam Angle	:	50°X100°
CRI (Ra)	:	80 (90/95 available on request)
Material	:	Die Cast Aluminium ADC-12
LED Brand	:	Litomatic/Bridgelux

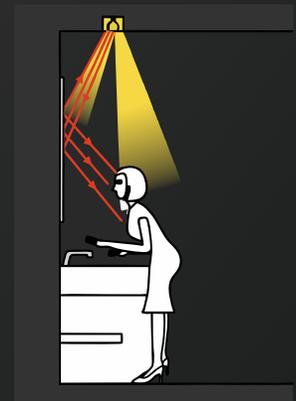

CLOUD

STEAM PROOF SPOTLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT


Zigbee

BK

WH

Body Color Available

Watt	:	15w
Dimension	:	85X70mm
Cut Out	:	75mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable) Note : 2700/3500/5000k (available on request)
Beam Angle	:	36°
CRI (Ra)	:	80 (90/95 available on request)
Material	:	Die Cast Aluminium ADC-12
LED Brand	:	Litomatic/Bridgelux



50,000
Hours



High
Lumens



Flicker Free



Upto 3.5KV
Surge



440V
OVP

5
Year
Warranty*



Anti Glare

IP44
IP Rating
On Request

STEAM

STEAM PROOF SPOTLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT


Zigbee

BK

WH

Body Color Available

Watt	:	12-15w
Dimension	:	85X60mm
Cut Out	:	72mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)
		Note : 2700/3500/5000k (available on request)
Beam Angle	:	36/60°
CRI (Ra)	:	80 (90/95 available on request)
Material	:	Die Cast Aluminium ADC-12
LED Brand	:	Litomatic/Bridgelux



50,000
Hours



High
Lumens



Flicker Free



Upto 3.5KV
Surge



440V
OVP

5

Year
Warranty*



Anti Glare

IP44

IP Rating
On Request

ABSOLUTE

ANTIGLARE SPOTLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT

Zigbee

BK


WH

Body Color Available

Watt	:	12w	20w	30w	36w
Dimension	:	88X65mm	110X75mm	136X96mm	160X110mm
Cut Out	:	75mm	95mm	125mm	150mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)			

Note : 2700/3500/5000k (available on request)

Beam Angle	:	90°
CRI (Ra)	:	80 (90/95 available on request)
Material	:	Die Cast Aluminium ADC-12
LED Brand	:	Litomatic/Bridgelux

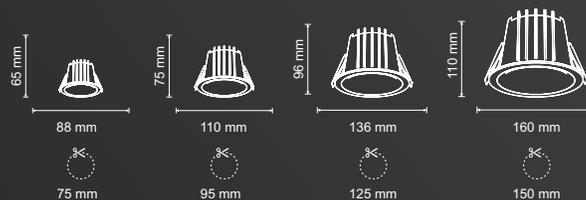

50,000 Hours



High Lumens



Flicker Free



Upto 3.5KV Surge



440V OVP



5 Year Warranty*



Anti Glare

OCEAN

ANTIGLARE SPOTLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT

Zigbee


BK

WH

Body Color Available




NEW
ARRIVAL

Watt	:	12w	20w
Dimension	:	85X55mm	105X90mm
Cut Out	:	75mm	95mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	60/90°	
CRI (Ra)	:	80 (90/95 available on request)	
Material	:	Die Cast Aluminium ADC-12	
LED Brand	:	Litomatic/Bridgelux	



EXCITE

LASERBLADE

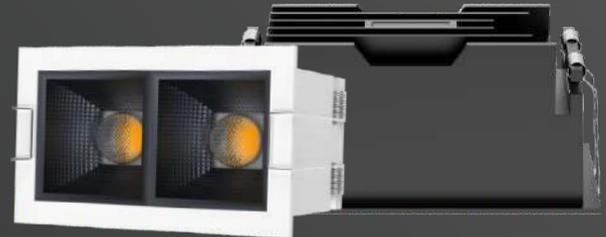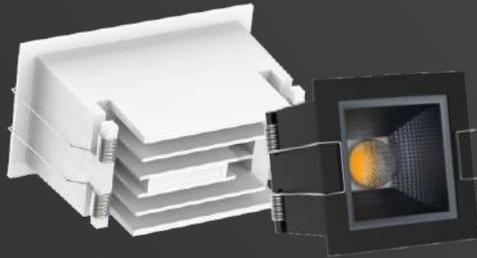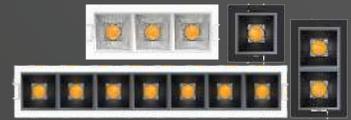

Watt : 5w
 Dimension : 50X50X50mm
 Cut Out : 42X42mm




10w
 88X50X50mm
 42X80mm

NEW
ARRIVAL



Watt : 15w
 Dimension : 126X50X50mm
 Cut Out : 42X118mm
 CCT (K) : 3000k/4000k/6500k/2700-6500k(Tunable)
 Note : 2700/3500/5000k (available on request)
 Beam Angle : 38°
 CRI (Ra) : 80 (90 available on request)
 Material : Die Cast Aluminium ADC-12
 LED Brand : Litomatic/Bridgelux

35w
 292X50X45mm
 42X284mm



Dimming & Tuning Technology



RF 2.4G + BLE TRIAC/PHASE CUT Zigbee

BK **WH** Body Color Available



EXTREME

LASERBLADE

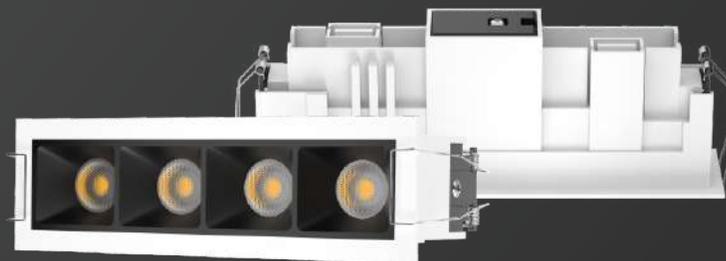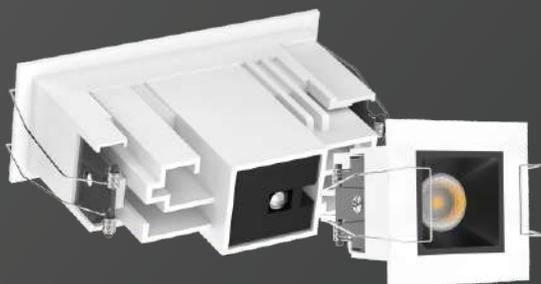

Watt : 3w
 Dimension : 32X32X55mm
 Cut Out : 25X25mm

5w
 54X32X55mm
 25X48mm




NEW
ARRIVAL



Watt : 10w
 Dimension : 97X32X52mm
 Cut Out : 25X90mm
 CCT (K) : 3000k/4000k/6500k/2700-6500k(Tunable)
 Note : 2700/3500/5000k (available on request)

15w
 140X32X55mm
 25X133mm

Beam Angle : 36°
 CRI (Ra) : 80 (90 available on request)
 Material : Die Cast Aluminium ADC-12
 LED Brand : Litomatic/Bridgelux



Dimming & Tuning Technology

DALI 2 RF 2.4G + BLE TRIAC/PHASE CUT Zigbee

BK WH Body Color Available



ELAN

LASERBLADE



Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT

Zigbee

BK


WH

Body Color Available

Watt	:	3w	10w	10w	12w
Dimension	:	45X45X42mm	75X75X42mm	85X38mm	147X45X42mm
Cut Out	:	35x35mm	70X70mm	75mm	142X35mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)			

Note : 2700/3500/5000k (available on request)

Beam Angle	:	24/36°
CRI (Ra)	:	80 (90 available on request)
Material	:	Die Cast Aluminium ADC-12
LED Brand	:	Litomatic/Bridgelux

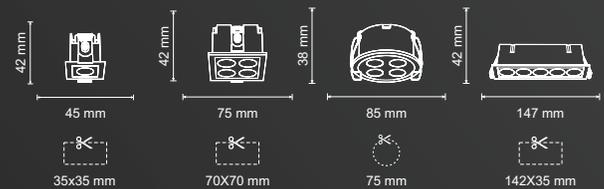

50,000 Hours



High Lumens



Flicker Free



Upto 3.5KV Surge



440V OVP




5 Year Warranty*



Anti Glare

ELAN

SURFACE LASERBLADE

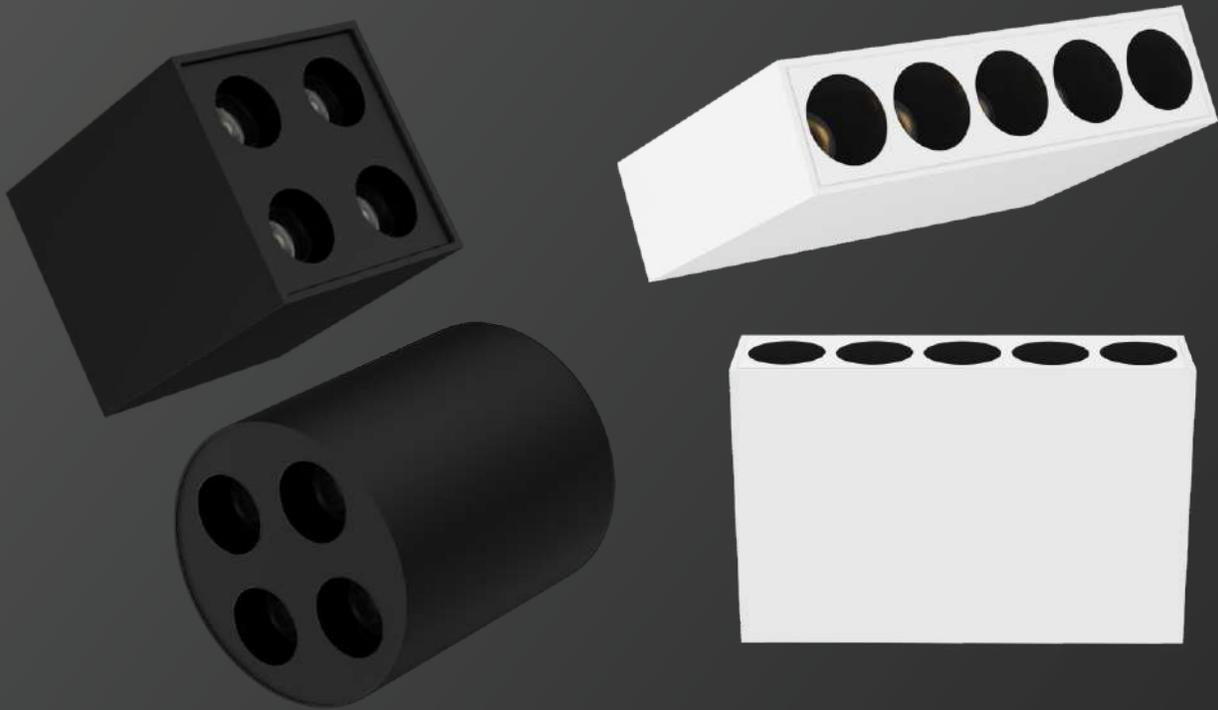

Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT

Zigbee

BK

WH

Body Color Available

Watt	:	10w	10w	12w
Dimension	:	70X83mm	66X66X83mm	138X36X83mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)		
		Note : 2700/3500/5000k (available on request)		
Beam Angle	:	24/36°		
CRI (Ra)	:	80 (90 available on request)		
Material	:	Die Cast Aluminium ADC-12		
LED Brand	:	Litomatic/Bridgelux		



HEXA

WALL GRAZER



Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT

Zigbee


BK

WH

Body Color Available

NEW
ARRIVAL

Watt	:	12w
Dimension	:	76X49X30mm
Cut Out	:	64X19mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)
		Note : 2700/3500/5000k (available on request)
Beam Angle	:	110°
CRI (Ra)	:	80 (90/95 available on request)
Material	:	Die Cast Aluminium ADC-12
LED Brand	:	Litomatic/Bridgelux



50,000
Hours



High
Lumens



Flicker Free



Upto 3.5KV
Surge



440V
OVP



5
Year
Warranty*



Anti Glare

EMERALD

WALL UPLIGHTER



Dimming & Tuning Technology



RF 2.4G + BLE


TRIAC/PHASE CUT

Zigbee

WH Body Color Available

NEW
ARRIVAL

Watt	:	20w
Dimension	:	162X155X35mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable) Note : 2700/3500/5000k (available on request)
Beam Angle	:	Polarized
CRI (Ra)	:	80 (90 available on request)
Material	:	Die Cast Aluminium ADC-12
LED Brand	:	Litomatic/Bridgelux



50,000
Hours



High
Lumens



Flicker Free



Upto 3.5KV
Surge



440V
OVP

5

Year
Warranty*



Anti Glare

HULK

ANTIGLARE SPOTLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT

Zigbee


BK

WH

Body Color Available

NEW
ARRIVAL

Watt	:	30w	36w	45w
Dimension	:	110X110mm	120X120mm	130X130mm
Cut Out	:	100mm	110mm	120mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)		
		Note : 2700/3500/5000k (available on request)		
Beam Angle	:	38/60°		
CRI (Ra)	:	80 (90/95 available on request)		
Material	:	Die Cast Aluminium ADC-12		
LED Brand	:	Litomatic/Bridgelux		

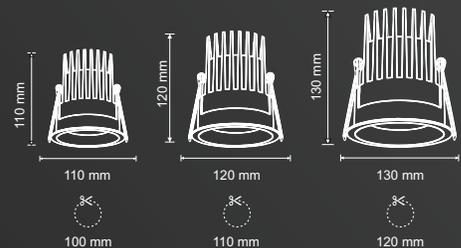

50,000
Hours



High
Lumens



Flicker Free



Upto 3.5KV
Surge



440V
OVP



5
Year
Warranty*



Anti Glare

TRACE

ADJUSTABLE SPOTLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT

Zigbee

BK


WH

Body Color Available

Watt	:	20-25w	30-36w
Dimension	:	105X77mm	130X90mm
Cut Out	:	90mm	115mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)	

Note : 2700/3500/5000k (available on request)

Beam Angle	:	36°
CRI (Ra)	:	80 (90/95 available on request)
Material	:	Die Cast Aluminium ADC-12
LED Brand	:	Litomatic/Bridgelux



DRIFT

ZOOMLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT


Zigbee

BK

WH

Body Color Available

Watt	:	20-25w	30-36w
Dimension	:	105X85mm	130X105mm
Cut Out	:	90mm	115mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	36°	
CRI (Ra)	:	80 (90/95 available on request)	
Material	:	Die Cast Aluminium ADC-12	
LED Brand	:	Litomatic/Bridgelux	



50,000
Hours



High
Lumens



Flicker Free



Upto 3.5KV
Surge



440V
OVP




5
Year
Warranty*





Anti Glare

HALO

LINEAR WALLWASHER



Standard size: 1M

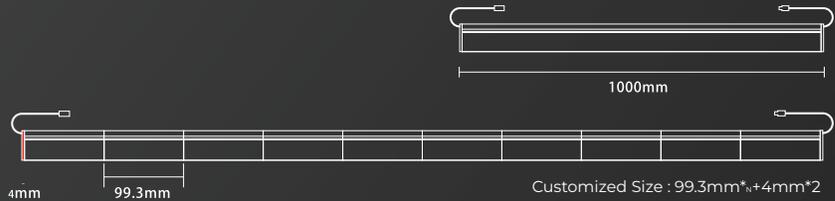

Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT

Zigbee


BK

WH

Body Color Available

NEW
ARRIVAL

Voltage	:	24V DC	
Watt	:	15w	30w
Dimension	:	500X25X26mm	1000X25X26mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	24° X 36° X 12°	
CRI (Ra)	:	80 (90 available on request)	
Material	:	Aluminium	
LED Brand	:	Litomatic/Bridgelux	



BULLET

CYLINDER SURFACE SPOTLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT


Zigbee

BK

WH

Body Color Available

Watt	:	7w	12w	20w
Dimension	:	45X100mm	55X115mm	62X130mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)		
		Note : 2700/3500/5000k (available on request)		
Beam Angle	:	24/36/50°		
CRI (Ra)	:	80 (90/95 available on request)		
Material	:	Aluminium		
LED Brand	:	Litomatic/Bridgelux		

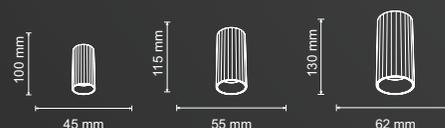

50,000
Hours



High
Lumens



Flicker Free



Upto 3.5KV
Surge



440V
OVP



5
Year
Warranty*




Anti Glare

ESTEEM

360° CYLINDER SPOTLIGHT

Watt	:	7w	12w
Dimension	:	45X140mm	55X140mm
Cut Out	:	42mm	52mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	36°	
CRI (Ra)	:	80 (90/95 available on request)	
Material	:	Die Cast Aluminium ADC-12	
LED Brand	:	Litomatic/Bridgelux	

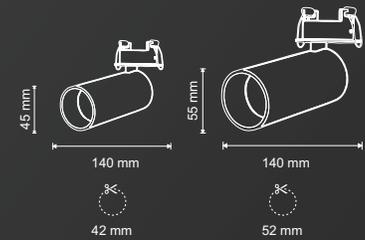


NEW
VERSION

ESTEEM

360° SURFACE CYLINDER SPOTLIGHT

Watt	:	7w	12w
Dimension	:	45X140mm	55X140mm
OD	:	45mm	55mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	36°	
CRI (Ra)	:	80 (90/95 available on request)	
Material	:	Die Cast Aluminium ADC-12	
LED Brand	:	Litomatic/Bridgelux	

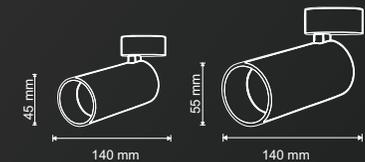

Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT Zigbee

BK WH Body Color Available



PACE

ADJUSTABLE SURFACE SPOTLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT


Zigbee

BK

WH

Body Color Available

Type	:	Square	Round
Watt	:	12w	12w
Dimension	:	80X80X110mm	80X110mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	36°	
CRI (Ra)	:	80 (90/95 available on request)	
Material	:	Die Cast Aluminium ADC-12	
LED Brand	:	Litomatic/Bridgelux	



50,000
Hours



High
Lumens



Flicker Free



Upto 3.5KV
Surge



440V
OVP





5
Year
Warranty*



Anti Glare

SHADE

SURFACE SPOTLIGHT

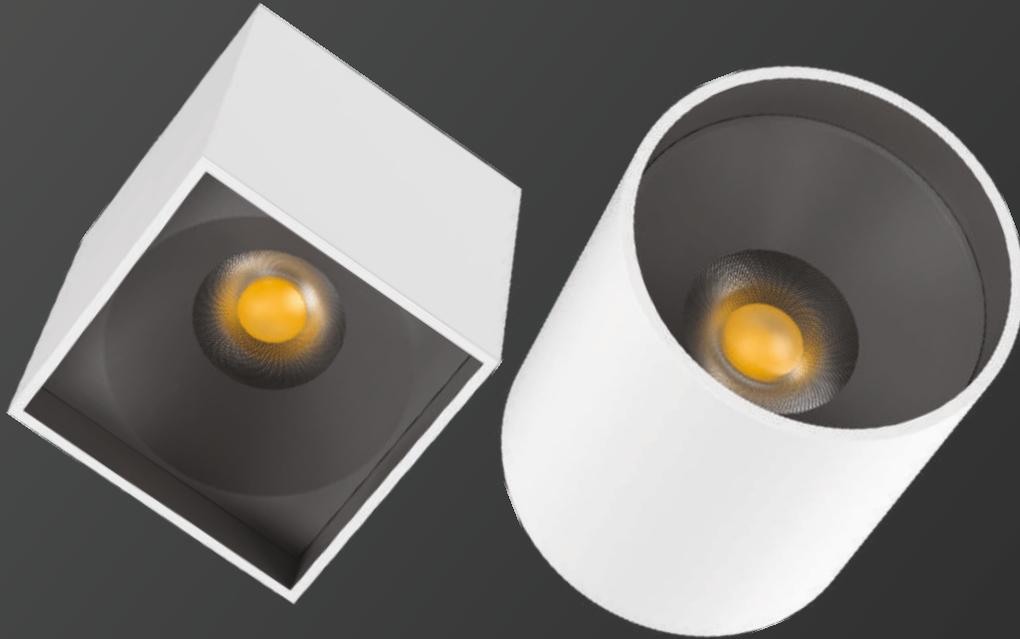

Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT


Zigbee

BK

WH

Body Color Available

Type	:	Square	Round
Watt	:	12w	12w
Dimension	:	78X78X90mm	80X90mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	36°	
CRI (Ra)	:	80 (90/95 available on request)	
Material	:	Die Cast Aluminium ADC-12	
LED Brand	:	Litomatic/Bridgelux	



MARVEL

DEGREE ADJUSTABLE TRACKLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT

Zigbee

BK

WH

Body Color Available

Watt	:	12w	20w	30w
Dimension	:	55X140mm	65X147mm	75X159mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)		
		Note : 2700/3500/5000k (available on request)		
Beam Angle	:	10-55°Adjustable		
CRI (Ra)	:	80 (90/95 available on request)		
Material	:	Die Cast Aluminium ADC-12		
LED Brand	:	Litomatic/Bridgelux		



50,000 Hours



High Lumens



Flicker Free



Upto 3.5KV Surge





440V OVP

5

Year Warranty*

FLARE

TRACKLIGHT

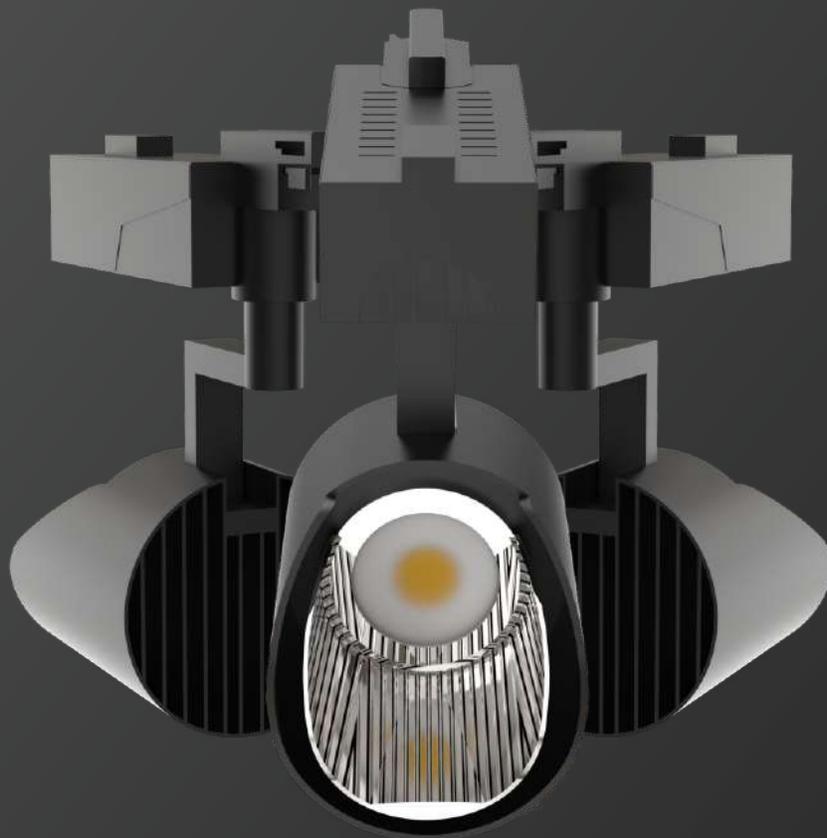

Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT

Zigbee

BK

WH

Body Color Available

NEW
ARRIVAL

Watt	:	20-25w	30-36w
Dimension	:	75X125X170mm	105X145X230mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	60°	
CRI (Ra)	:	80 (90/95 available on request)	
Material	:	Die Cast Aluminium ADC-12	
LED Brand	:	Litomatic/Bridgelux	



GLOOM

TRACKLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT

Zigbee


BK

WH

Body Color Available

NEW
ARRIVAL

Watt	:	20-25w	30-36w
Dimension	:	72X135mm	85X145mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	45°	
CRI (Ra)	:	80 (90/95 available on request)	
Material	:	Die Cast Aluminium ADC-12	
LED Brand	:	Litomatic/Bridgelux	



50,000
Hours



High
Lumens



Flicker Free



Upto 3.5KV
Surge



440V
OVP


5

Year
Warranty*

HOPE

MINI SPOTLIGHT


Watt	:	3w
Dimension	:	22X56mm
Cut Out	:	18mm
CCT (K)	:	3000k/4000k/6500k
Beam Angle	:	24°
CRI (Ra)	:	80 (90 available on request)
Material	:	Aluminium
LED Brand	:	Litomatic/Bridgelux



MINT

MINI SPOTLIGHT

Watt	:	3w
Dimension	:	20X63mm
Cut Out	:	17mm
CCT (K)	:	3000k/4000k/6500k
Beam Angle	:	24°
CRI (Ra)	:	80 (90 available on request)
Material	:	Aluminium
LED Brand	:	Litomatic/Bridgelux



Dimming & Tuning Technology




RF 2.4G + BLE

TRIAC/PHASE CUT Zigbee

BK WH Body Color Available



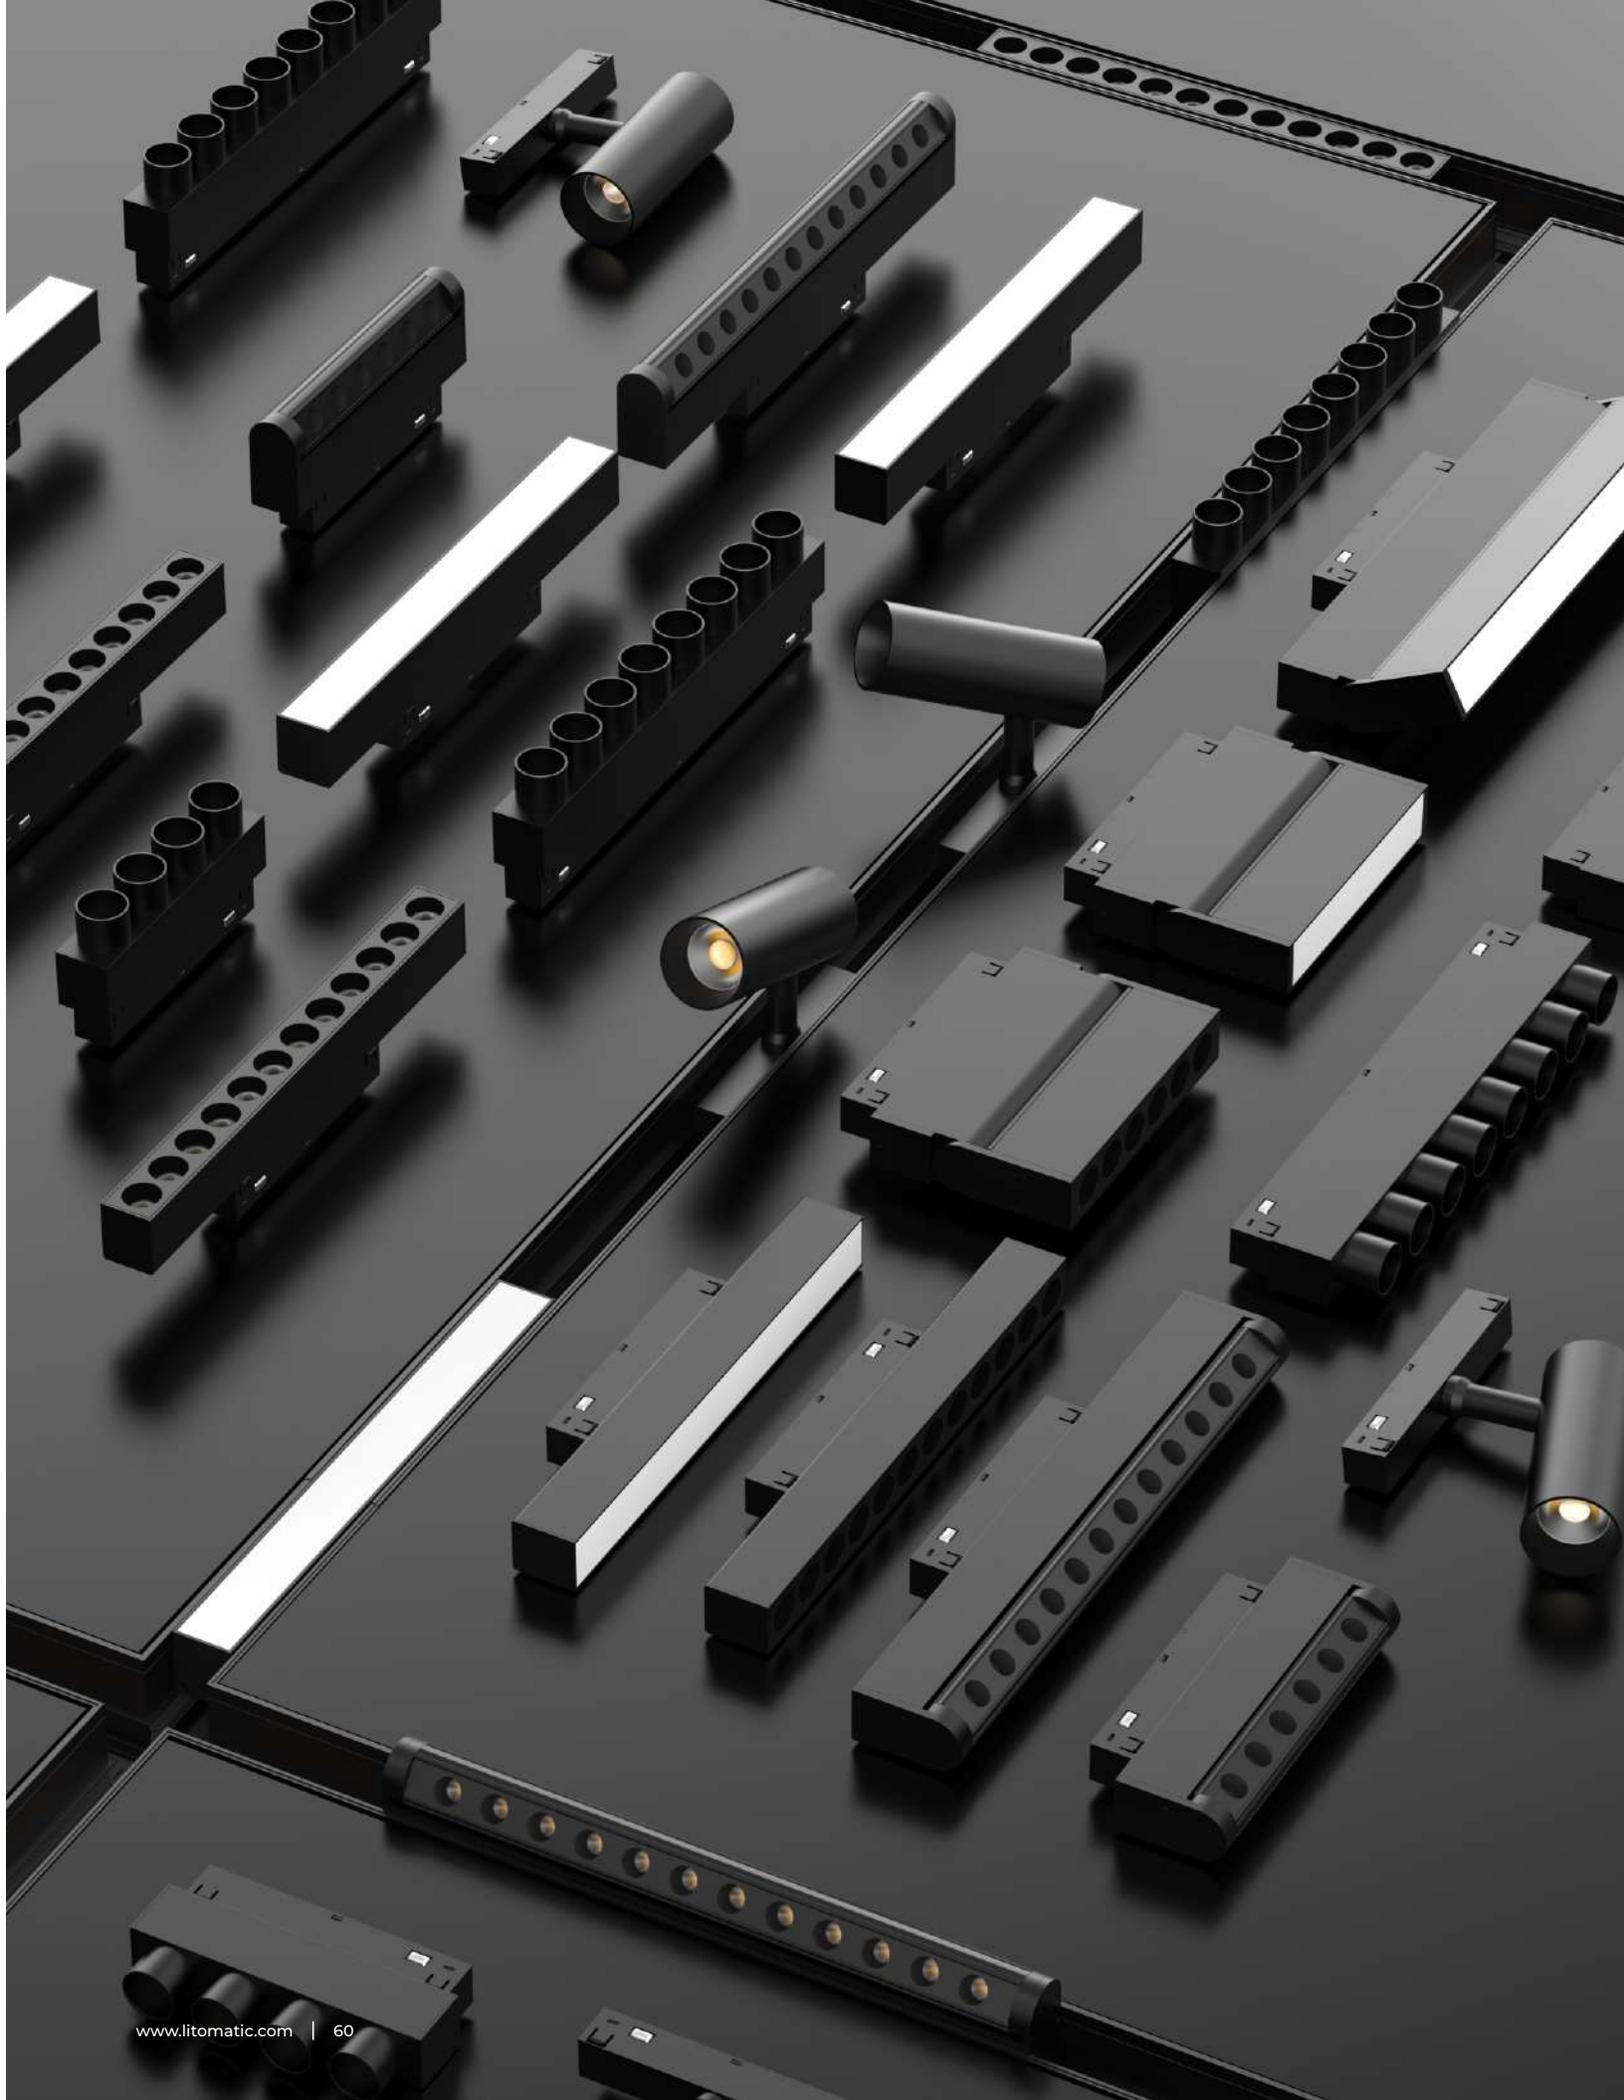

20MM MAGIC

MAGNETIC TRACK SERIES


Hanging —●



Surface —●






Concealed —●





TC20

End Caps

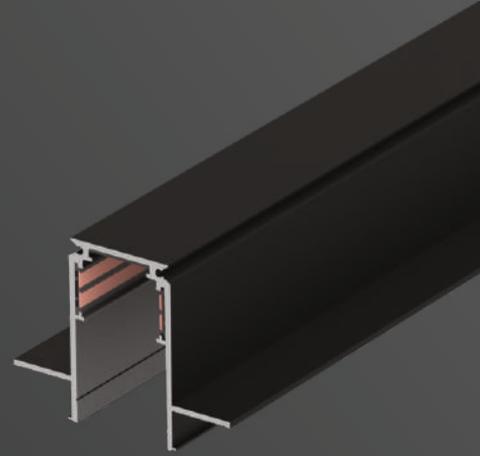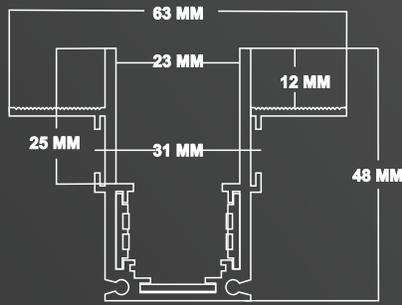



90° Corner (C to C)

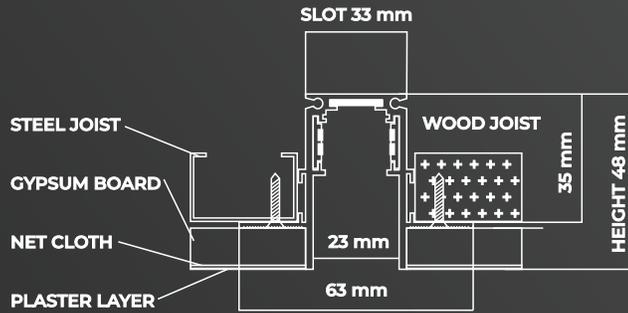


TH20

End Caps

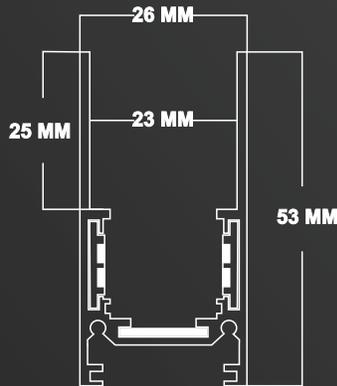



90° Corner (C to C)



SURFACE


SUSPENDED



20MM MAGIC

LASER BLADE


Watt	:	10w	20w
Dimension	:	112X22X25mm	220X22X25mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	36°	
CRI (Ra)	:	80 (90 available on request)	
Material	:	Aluminium	
LED Brand	:	Litomatic/Bridgelux	

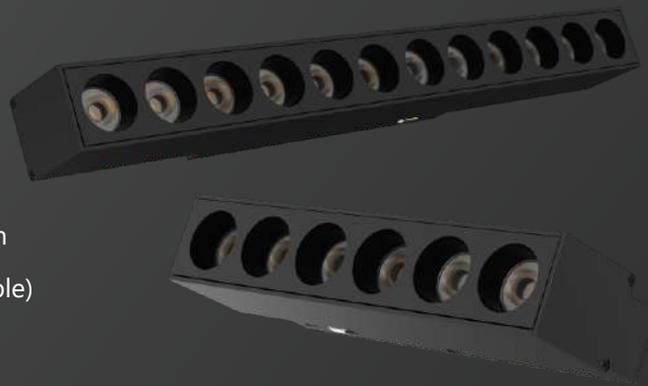

20MM MAGIC

MOVABLE LASER BLADE

Watt	:	10w	20w
Dimension	:	112X22X90mm	220X22X90mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	36°	
CRI (Ra)	:	80 (90 available on request)	
Material	:	Aluminium	
LED Brand	:	Litomatic/Bridgelux	



Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT

Zigbee

BK

WH



Body Color Available



20MM MAGIC

WALLWASHER

Watt	:	10w	20w
Dimension	:	132X22X42mm	246X22X42mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	36°	
CRI (Ra)	:	80 (90 available on request)	
Material	:	Aluminium	
LED Brand	:	Litomatic/Bridgelux	

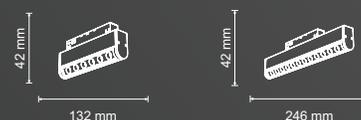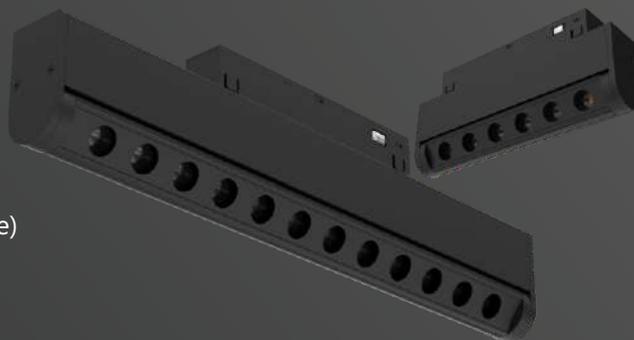

20MM MAGIC

SPOTLIGHT

Watt	:	8w	16w
Dimension	:	110X22X42mm	218X22X42mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	30°	
CRI (Ra)	:	80 (90 available on request)	
Material	:	Aluminium	
LED Brand	:	Litomatic/Bridgelux	



Dimming & Tuning Technology



RF 2.4G + BLE TRIAC/PHASE CUT Zigbee

BK WH Body Color Available



50,000
Hours



High
Lumens



Flicker Free



Upto 3.5KV
Surge



440V
OVP



5
Year
Warranty*





Anti Glare

20MM MAGIC

LINEAR DIFFUSED DOWNLIGHT



Watt	:	10w	20w	30w (Corner 90°)
Dimension	:	203X22X25mm	303X22X25mm	300X320X25mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)		
		Note : 2700/3500/5000k (available on request)		
Beam Angle	:	120°		
CRI (Ra)	:	80 (90 available on request)		
Material	:	Aluminium		
LED Brand	:	Litomatic/Bridgelux		

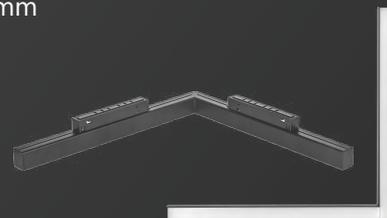

20MM MAGIC

MOVABLE LINEAR DIFFUSED DOWNLIGHT

Watt	:	10w	20w
Dimension	:	203X320X90mm	303X320X90mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	120°	
CRI (Ra)	:	80 (90 available on request)	
Material	:	Aluminium	
LED Brand	:	Litomatic/Bridgelux	

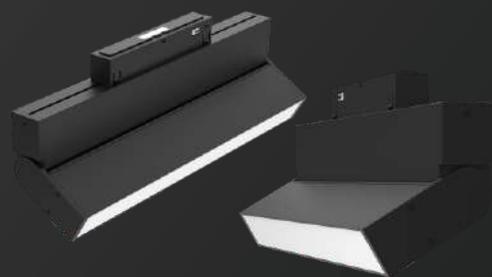

Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT Zigbee

BK WH Body Color Available



20MM MAGIC

TRACKLIGHT

Watt	:	7w	12-15w	20w
Dimension	:	38X90X162mm	48X126X190mm	48X126X210mm
Beam Angle	:	15/24/36/60°	15/24/36/60°	15/24/36/60°



CONCEALED

TRACKLIGHT

Watt	:	7w	12-15w
Dimension	:	38X90X150mm	48X126X180mm
Cut Out	:	52mm	52mm
Beam Angle	:	15/24/36/60°	15/24/36/60°



SURFACE

TRACKLIGHT

Watt	:	7w	12-15w
Dimension	:	38X90X160mm	48X126X190mm
Beam Angle	:	15/24/36/60°	15/24/36/60°

CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)
		Note : 2700/3500/5000k (available on request)
CRI (Ra)	:	80 (90/95 available on request)
Material	:	Die Cast Aluminium ADC-12
LED Brand	:	Litomatic/Bridgelux



BK WH Body Color Available



50,000
Hours



High
Lumens



Flicker Free



Upto 3.5KV
Surge



440V
OVP



5
Year
Warranty*



Anti Glare

20MM MUSEUM

DEGREE ADJUSTABLE TRACKLIGHT


Watt	:	12w
Dimension	:	47X195X115mm
Beam Angle	:	25-36°



CONCEALED

TRACKLIGHT


Watt	:	12w
Dimension	:	47X195X130mm
Cut Out	:	52mm
Beam Angle	:	25-36°



SURFACE

TRACKLIGHT

Watt	:	12w
Dimension	:	47X195X130mm
Beam Angle	:	25-36°
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable) Note : 2700/3500/5000k (available on request)
CRI (Ra)	:	80 (90/95 available on request)
Material	:	Die Cast Aluminium ADC-12
LED Brand	:	Litomatic/Bridgelux



20MM HANGING

IRIS

Type	:	Iris
Watt	:	12w
Dimension	:	40X304.8mm
Beam Angle	:	15/24/36/60°
CRI	:	80 (90/95 available on request)



20MM HANGING

DESIRE

Type	:	Desire		
Watt	:	7w	12w	20w
Dimension	:	56X75mm	64X85mm	70X95mm
Beam Angle	:	15/24/36/60°	15/24/36/60°	15/24/36/60°
CRI	:	80 (90/95 available on request)		



20MM HANGING

IGNITE

Watt	:	8w	15w	22w
Dimension	:	90X75mm	110X75mm	125X75mm
Beam Angle	:	110°	110°	110°
CRI (Ra)	:	80 (90 available on request)		
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable) Note : 2700/3500/5000k (available on request)		
Material	:	Die Cast Aluminium ADC-12		
LED Brand	:	Litomatic/Bridgelux		



BK WH Body Color Available



50,000
Hours



High
Lumens



Flicker Free



Upto 3.5KV
Surge



440V
OVP



5
Year
Warranty*



Anti Glare

20MM HANGING

TUBE

Watt (Size)	:	10w (1mtr.)	15w (2mtr.)
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)	
		Note : 2700/3500/5000k (available on request)	
CRI (Ra)	:	80 (90 available on request)	
LED Brand	:	Litomatic/Bridgelux	

20MM HANGING

CORE

Watt	:	12w
Dimension	:	55x70mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)
		Note : 2700/3500/5000k (available on request)
Beam Angle	:	24/36°
CRI (Ra)	:	80 (90/95 available on request)
Material	:	Die Cast Aluminium ADC-12
LED Brand	:	Litomatic/Bridgelux

NEW
ARRIVAL

Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT Zigbee

BK WH Body Color Available



20MM MAGIC


MAGIC ACCESSORIES



90° TC & TH Corner




TC & TH Curve Corner

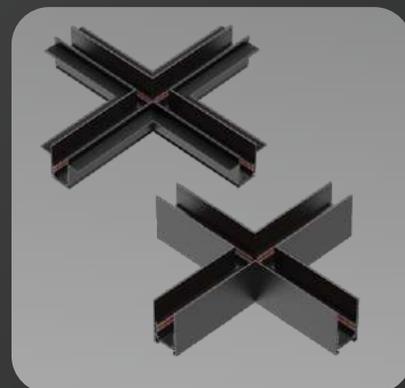

Plus TC & TH Corner



T TC & TH Corner

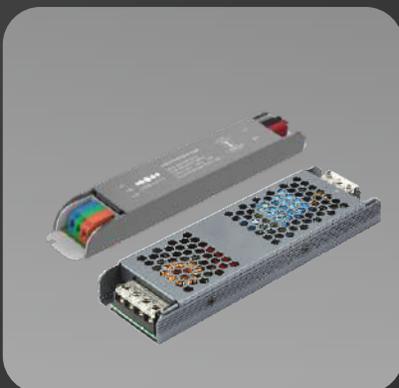

TC Power Supply




TH Power Supply



DC Connector



DC Connector

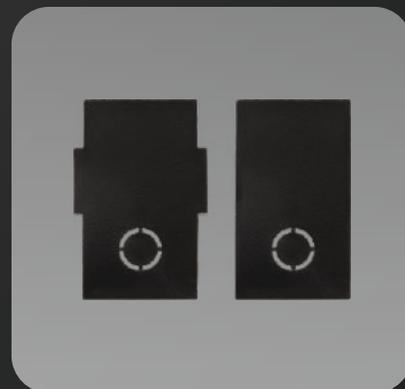


TC & TH End Caps



10MM MAGIC

MAGNETIC TRACK SERIES



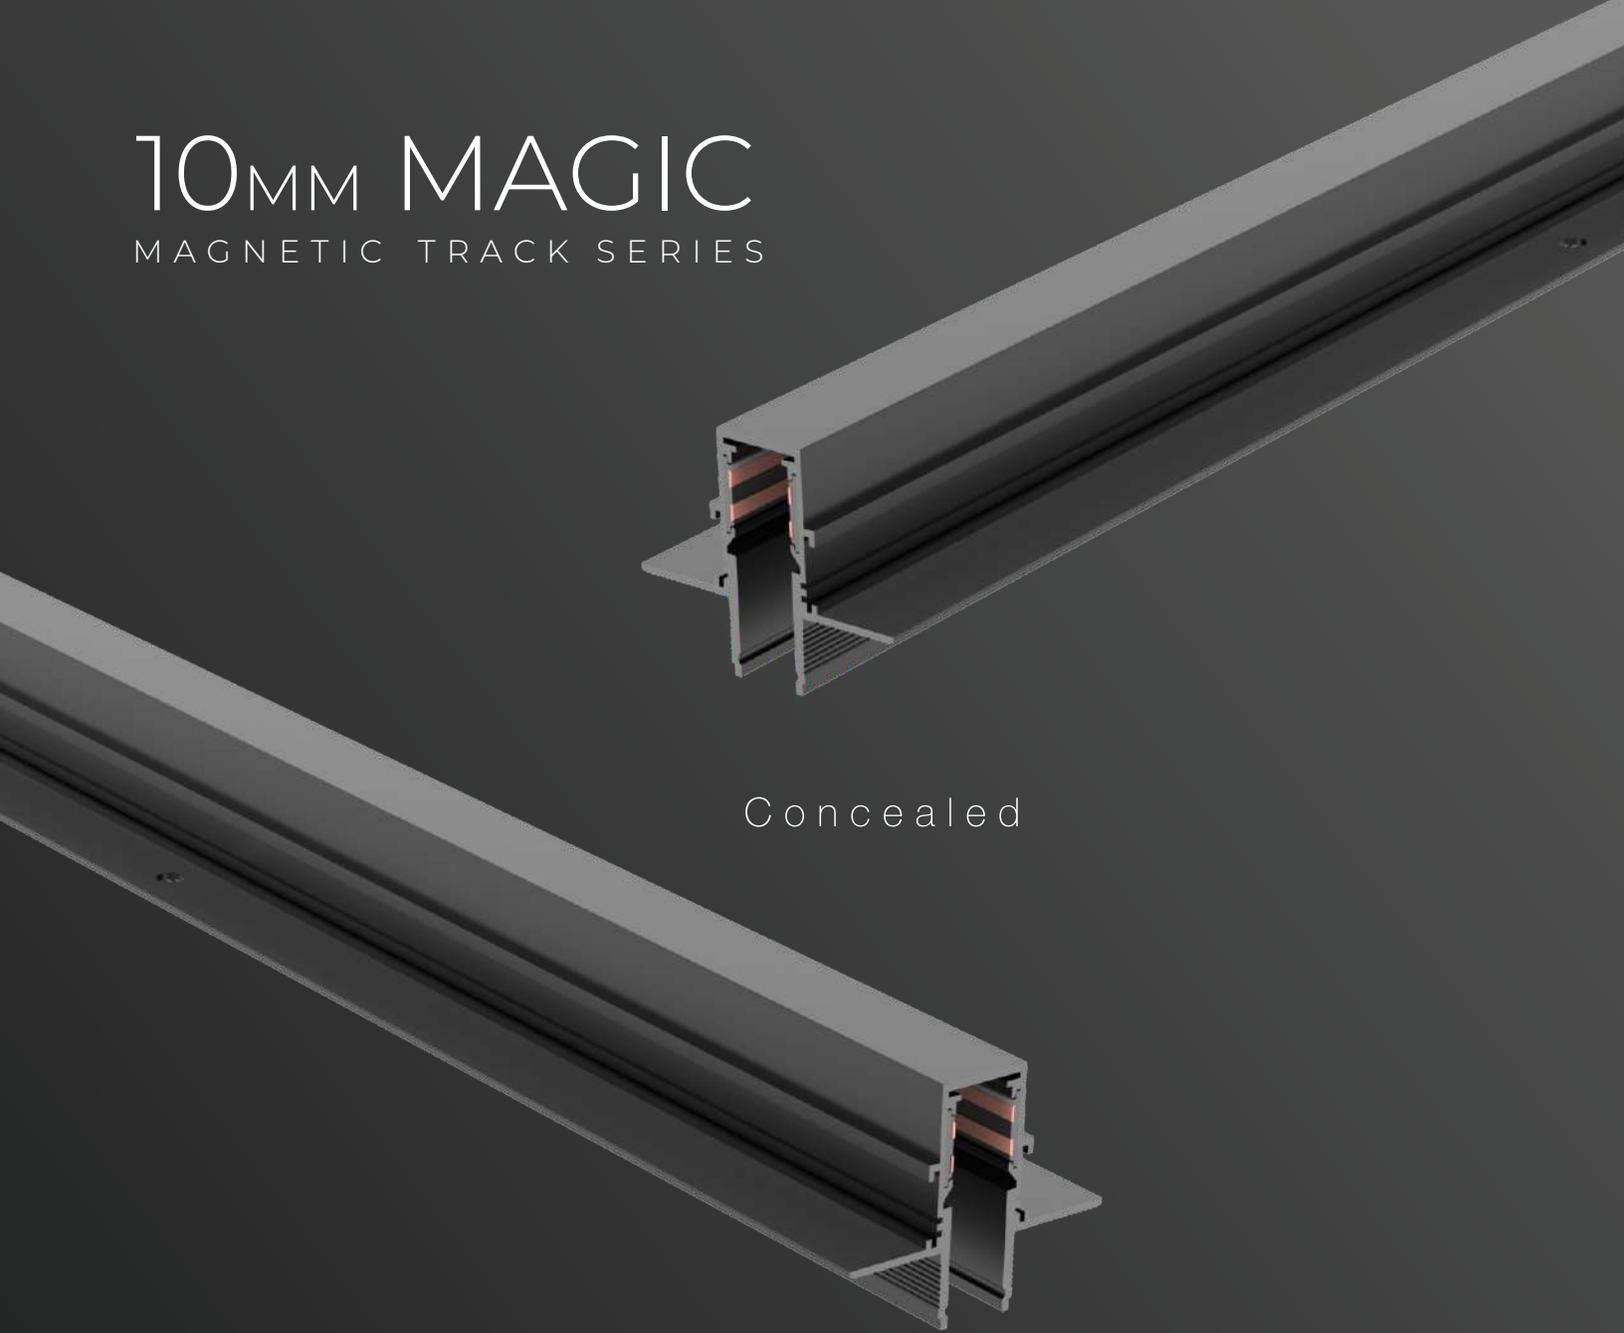


Concealed

End Caps





90° Corner (C to C)

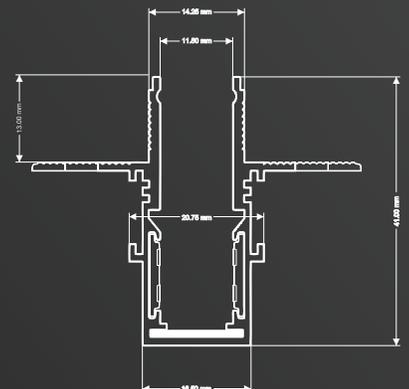

10MM MAGIC

LASER BLADE



Watt	:	12w	18w
Dimension	:	290X11X39mm	420X11X39mm
CCT (K)	:	3000k/4000k/6500k	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	30°	
CRI (Ra)	:	80 (90 available on request)	
Material	:	Aluminium	
LED Brand	:	Litomatic/Bridgelux	

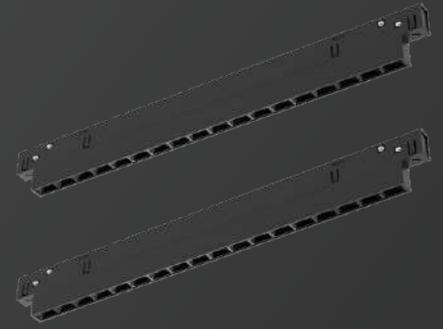

10MM MAGIC

MOVABLE LASER BLADE

Watt	:	5w	10w
Dimension	:	100X73X11mm	195X73X11mm
CCT (K)	:	3000k/4000k/6500k	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	30°	
CRI (Ra)	:	80 (90 available on request)	
Material	:	Aluminium	
LED Brand	:	Litomatic/Bridgelux	

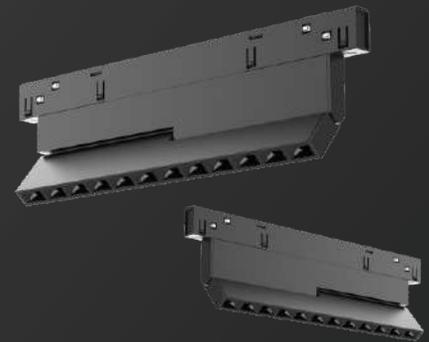

Dimming & Tuning Technology



RF 2.4G + BLE


TRIAC/PHASE CUT Zigbee

BK WH Body Color Available



10MM MAGIC

LINEAR DIFFUSED DOWNLIGHT

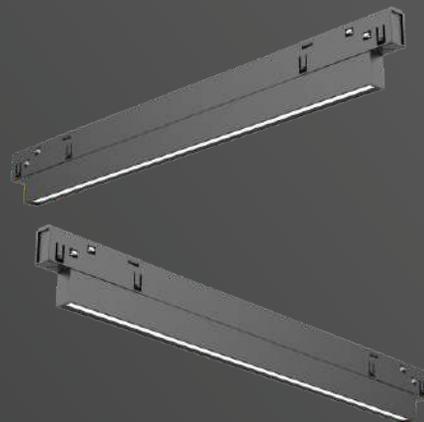

Watt	:	8w	12w
Dimension	:	300X11X40mm	450X11X40mm
CCT (K)	:	3000k/4000k/6500k	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	100°	
CRI (Ra)	:	80 (90 available on request)	
Material	:	Aluminium	
LED Brand	:	Litomatic/Bridgelux	




10MM MAGIC

TRACK LIGHT



Watt	:	7w	12w
Dimension	:	90X82X35mm	110X88X45mm
CCT (K)	:	3000k/4000k/6500k	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	36°	
CRI (Ra)	:	80 (90/95 available on request)	
Material	:	Aluminium	
LED Brand	:	Litomatic/Bridgelux	

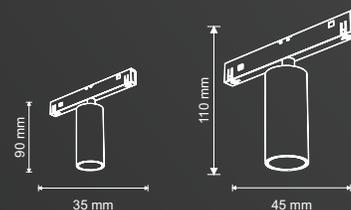

Dimming & Tuning Technology

 RF 2.4G + BLE  TRIAC/PHASE CUT Zigbee

BK **WH** Body Color Available



50,000 Hours



High Lumens



Flicker Free



Upto 3.5KV Surge



440V OVP




5 Year Warranty*




Anti Glare

10MM MAGIC

MAGIC ACCESSORIES

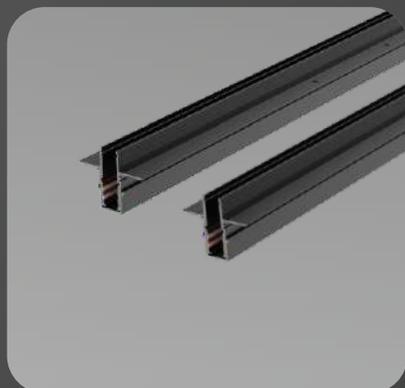


TC Track

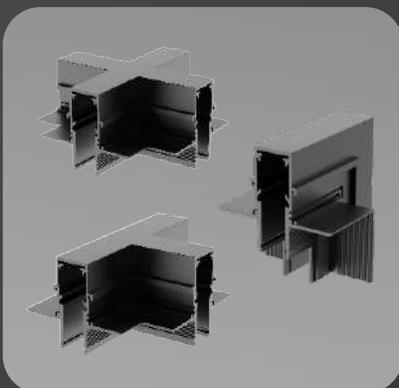


TC Corner




Blade

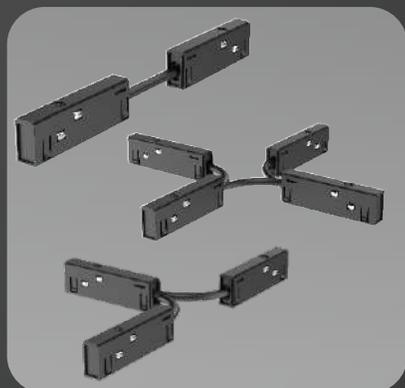

DC Connector

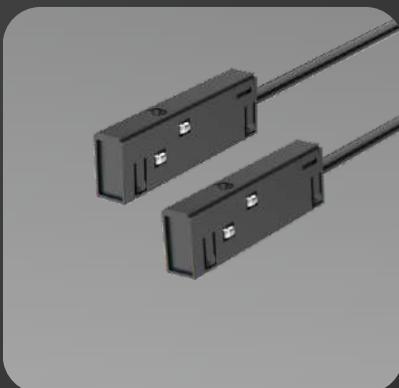

DC Connector

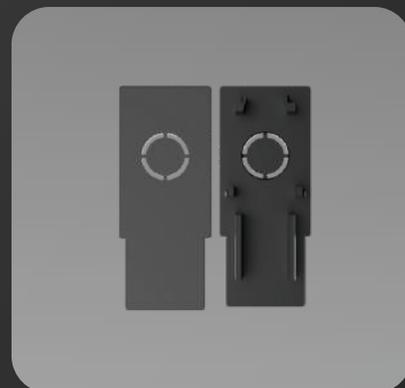

END Caps



Power Supply



Hanging Set

COMING
SOON

6MM 48V
MAGNETIC
SYSTEM

6MM 48V

DAY LIGHT SENSOR

MOTION SENSOR




HUMAN BEING SENSOR

MOTION SENSOR



ILLUMINATION SENSOR

SENSOR



BUTTON REMOTE



REMOTE

REMOTE CONTROLLER



SCENE SWITCH

SCENE CONTROLLER



Note : Wired version also Available

NEW
ARRIVAL

TOUCH PANEL

SCREEN



GATEWAY BLE



OUR CLIENTS





WHERE LIGHT
BECOMES THE
MASTERPIECE



SIMPLIFIED INTELLIGENT LIGHTING

Head Office

Plot No. : E-1 228, RIICO Industrial Area,
Opp. Urban Square Mall, Sukher,
Udaipur - 313001 (Raj.)

E : info@litomatic.com

w : www.litomatic.com